
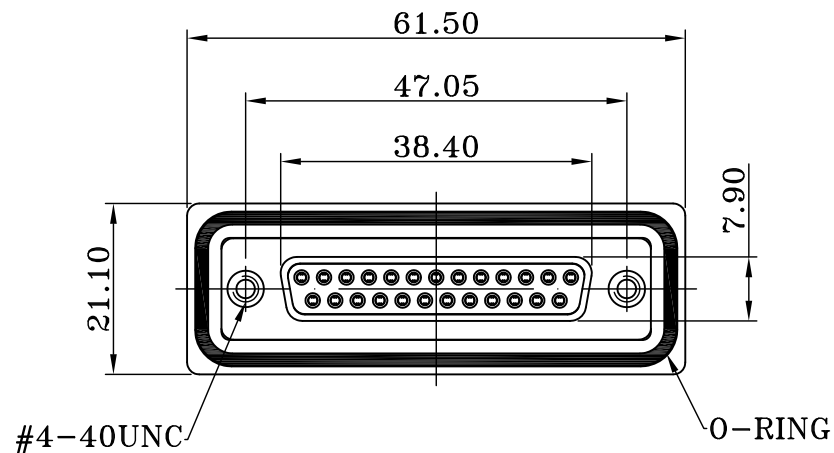


SEALING COMPOUND

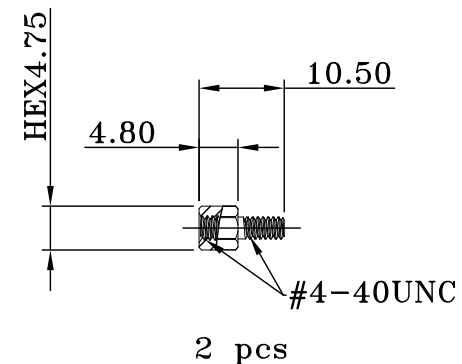

2 pcs

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED

INSULATOR : PBT GF, UL 94V-0 , BLACK COLOR

WATERTIGHT FRAME : PBT GF, UL 94V-0, BLACK COLOR

O-RING : SILICONE

SEALING COMPOUND : EPOXY

HEXLOCKING SCREW : STAINLESS STEEL

SIGNAL CONTACT : COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 5.0 A

SIGNAL CONTACT RESISTANCE : 10 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V FOR 1 MINUTE

INSULATION RESISTANCE : 5GΩ MIN.

TEMPERATURE RATING : -25°C ~ +85°C

DEGREE OF PROTECTION : IP67 ACCORDING TO IEC60529

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 5°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

WPDB-SSNH-25-LF

SERIES
LEADFREE
25 WAY
HEX SCREW
NUT
SOLDER
FEMALE

DESCRIPTION: