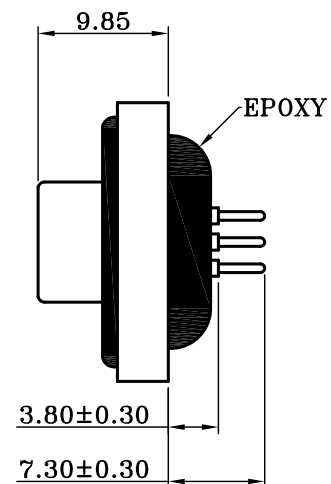
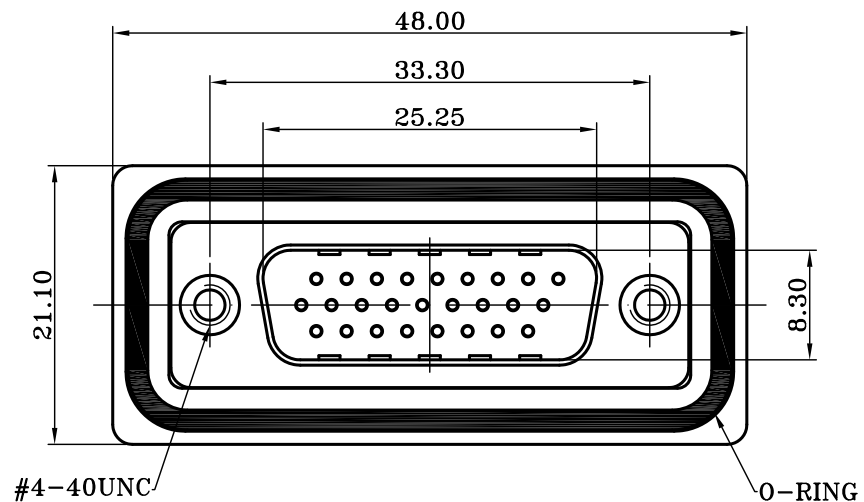


PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED
 INSULATOR : PBT GF, UL 94V-0 , BLACK COLOR
 WATERTIGHT FRAME : PBT GF, UL 94V-0, BLACK COLOR
 O-RING : SILICONE
 SEALING COMPOUND : EPOXY
 HEXLOCKING SCREW : COPPER ALLOY
 SIGNAL CONTACT : COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 3.0 A
 SIGNAL CONTACT RESISTANCE : 10 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V FOR 1 MINUTE
 INSULATION RESISTANCE : 5GΩ MIN.
 TEMPERATURE RATING : -25°C ~ +85°C
 DEGREE OF PROTECTION : IP67 ACCORDING TO IEC60529

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 5°

ORDER INFORMATION

WPHD-PDH-26-LF

SERIES

LEADFREE

26WAY

HEX SCREW

DIP 180°

MALE

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com