
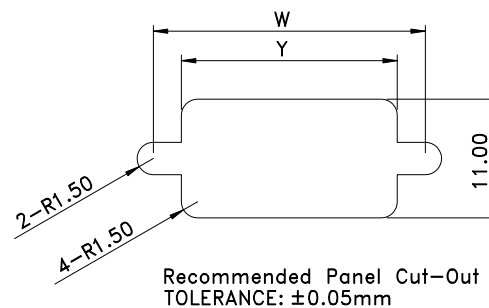


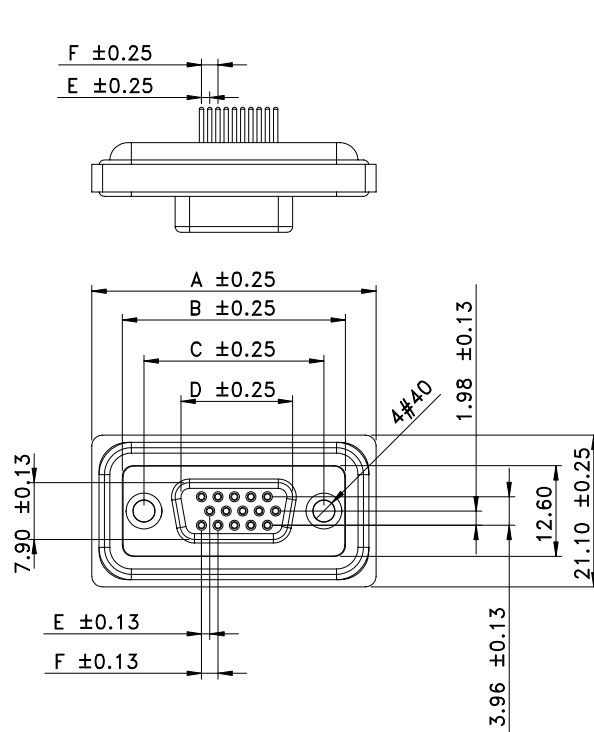

SPECIFICATION

MATERIAL




Insulator: Thermoplastic
Contacts: Copper Alloy
Shell: Steel
O-ring: Silicone
Sealant: Epoxy-Resin
Rivet: Copper Alloy

CONTACT PLATING


Underplate :50u"~150u" Nickel
Contact Area :1u"~30u" Selective Gold
Rivet :50u"~100u" Nickel

ELECTRICAL


Operation Voltage :250 VAC Max
Current Rating :3 Amps Max
Contact Resistance :15 Mohms Min 500 VDA
Dielectric Withstanding Voltage 1000 VAC/Minute
Temperature Range :-55°C TO +105°C

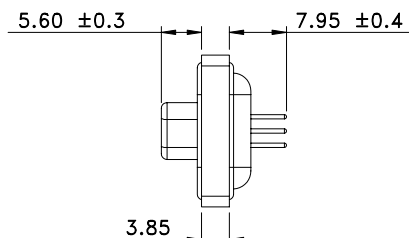


PIN	A	B	C	D	E	F	W	Y
15	39.50	31.00	25.00	16.34	1.145	2.29	25.20	20
26	48.00	39.30	33.32	24.66	1.145	2.29	33.50	28.30
44	61.50	53.20	47.04	38.38	1.145	2.29	47.20	42.00
62	77.80	69.50	63.50	54.84	1.205	2.41	63.70	58.50



Recommended P.C.B Layout
For 15PIN TOLERANCE: ±0.05mm



Recommended P.C.B Layout
For 26PIN Z=18.32
For 44PIN Z=32.06
TOLERANCE: ±0.05mm

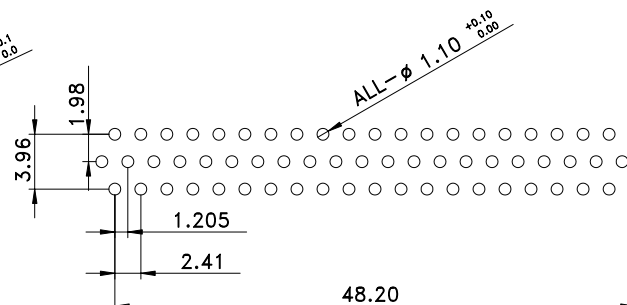

Recommended P.C.B Layout
For 62PIN TOLERANCE: ±0.05mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

WPHD-SDH-xx-LF

SERIES

LEADFREE

15~62WAY

HEX SCREW

DIP 180°

FEMALE

DESCRIPTION: Water Proof HIGH DENSITY D-SUB(DIP180° FEMALE)