

Panel Thickness


X(Max.)

Screw L=5.0 For Panel Thickness

Under 1.2mm



Screw L=6.0 For Panel Thickness

Between 1.2~2.0mm

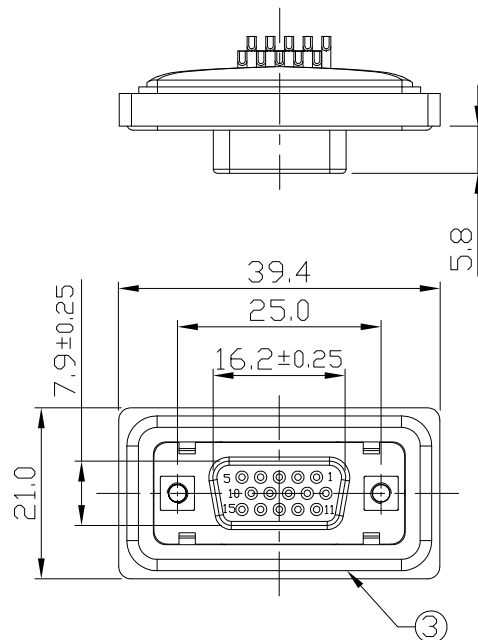


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Recommend Panel Thickness: 0.8 to 2.0 mm.
3. Recommend Torque: 2.5~3.0 Kgf-cm.

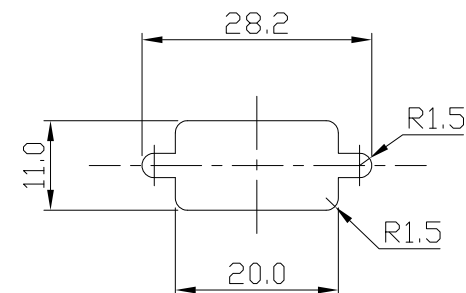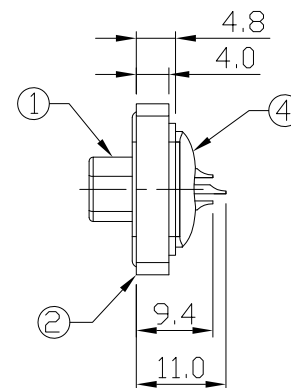

Recommend
Panel Cut-Out



Screws on The Separate Bag

5	Machine Screw	#4-40, Copper Alloy Finish: Ni Plated	4
4	Glue	Epoxy Color: Black	
3	O-Ring	Silicone Color: Red	
2	Housing	Thermoplastic Color: Black	1
1	D-SUB HD 15P Female	Shell: Cold Roll Steel, Finish: Ni Plated	1
		Contacts: Copper Alloy, Finish: Gold Flash	
		Housing: Thermoplastic, Color: Black	
Item	Part Name	Material / Finish	Q'ty

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

WPHD-SSH-15-LF

SERIES

LEADFREE

15WAY

HEX SCREW

SOLDER

FEMALE

DESCRIPTION: