

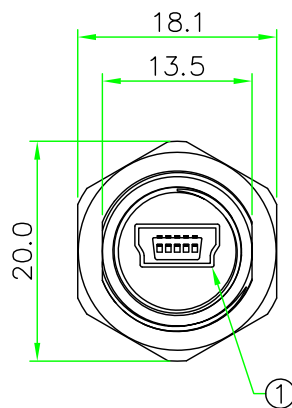
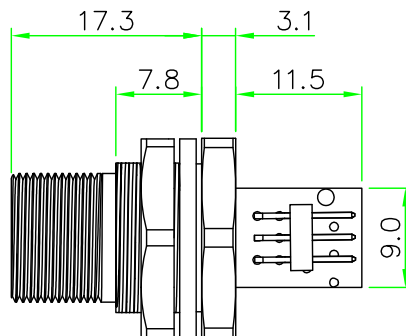



Recommended
Panel Cut Out




Front View
(前視圖)

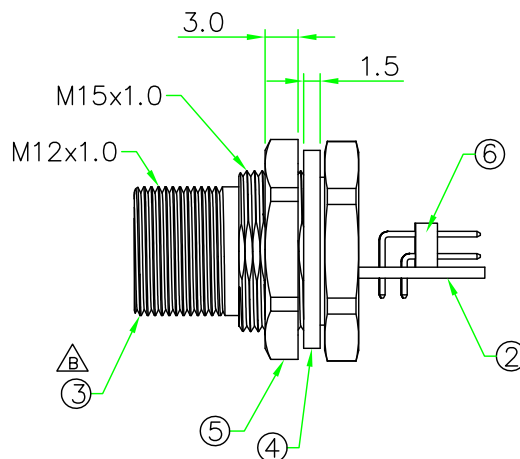


Rear View
(後視圖)



Pin Assignment
Front View (前視圖)



Pin Assignment
Rear View (後視圖)

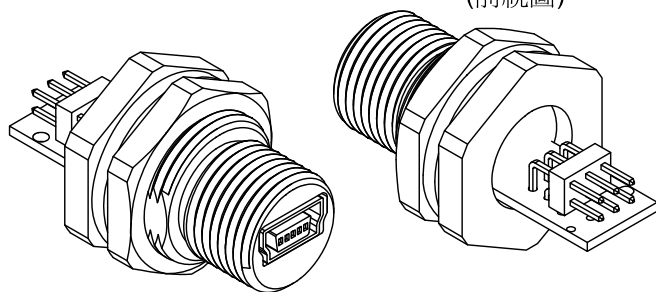

6	PIN HEADER	Pitch 2.0mm. 5Px2Row. Right Angle Type.	BLACK	1
5	HEX NUT	NYLON+GF.	BLACK	1
4	GASKET	EPDM.	BLACK	1
3	HOUSING	NYLON+GF.	BLACK	1
2	PCB	Double Side PCB.		N
1	CONNECTOR	Mini USB B Type Female Connector.	BLACK	1
No.	PART NAME	DESCRIPTION	COLOR	Q'TY

Specification:

1. Current rating : 1A Max.
2. Dielectric withstanding voltage: 100V(AC) for 1 minute.
3. Contact resistance : 50mΩ Max.
4. Insulation resistance : 100mΩ Min.
5. Temperature range:-20°C ~+60°C.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

WPMB-SS4PBNBOK-5BM-LF

SERIES FEMALE SOLDER DOUBLE ROW DIP 90°
M15x1.0 METRIC ON 5 PIN B TYPE
BLACK RING NUT
PANEL BACK

DESCRIPTION: Mini USB B Type 5P Female Connector All Plastic Rear Mount Hex Flange Right Angle PCB Pin

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ± 3°