


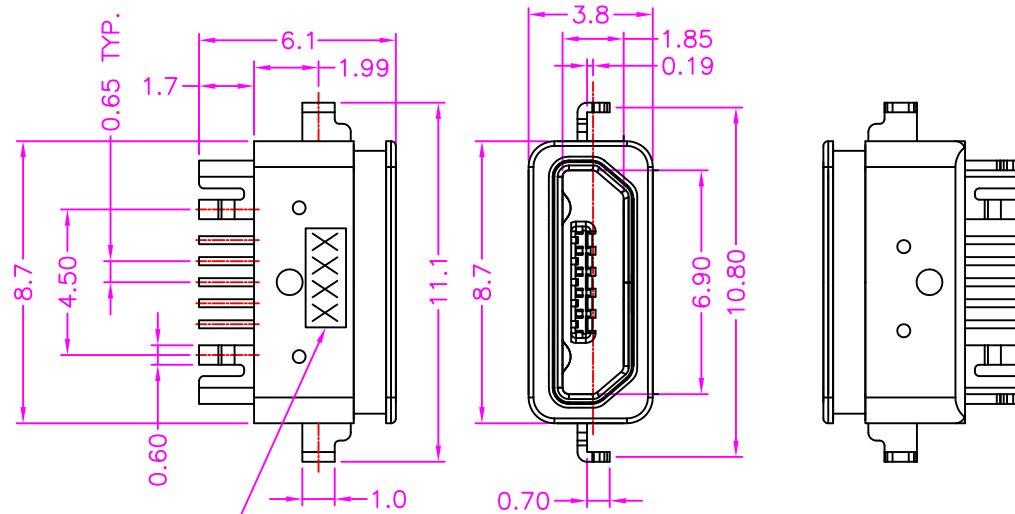




DATE CODE



RECESSED MOUNTING CONFIGURATION

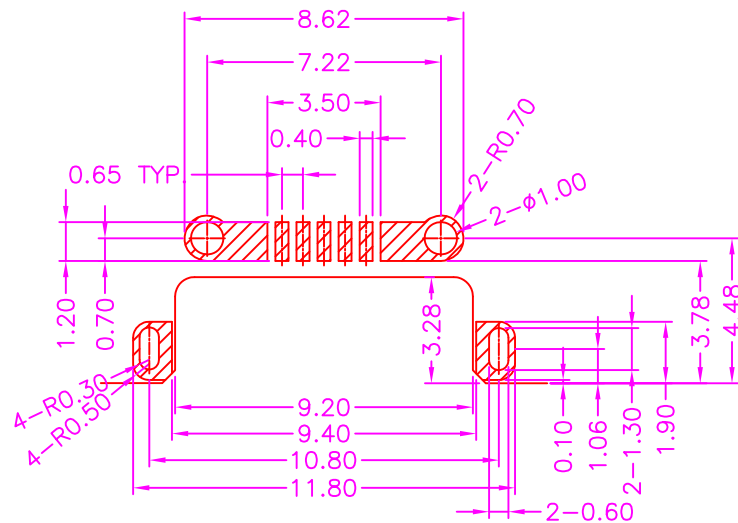


P.C.B. LAYOUT
TOP VIEW ± 0.05

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)
SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED
O-RING: SILICON

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-20^{\circ}\text{C} \sim +105^{\circ}\text{C}$



照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm 5^{\circ}$

ORDER INFORMATION

WPMIB-SWXFMM-5B-LF

SERIES
FEMALE
LEADFREE
5 PIN B TYPE
METAL FOOT
OFFSET
NON POST
90°SMT

DESCRIPTION: MICRO USB B TYPE, PCB MOUNT, WATERPROOF SMT MID MOUNT TYPE, METAL SHIELD, FEMALE(IP67)