
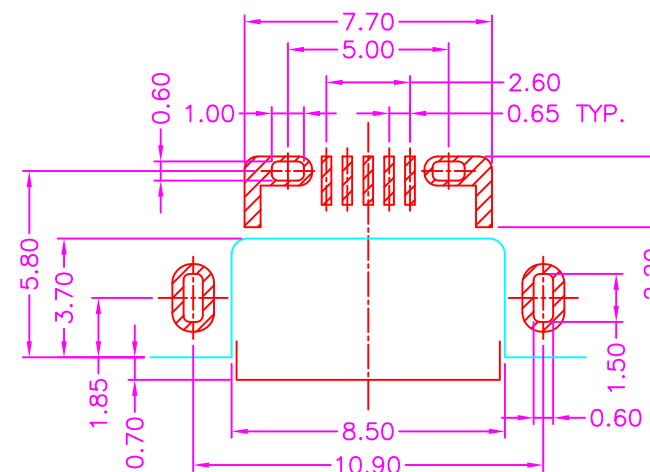
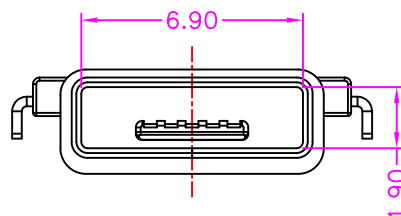
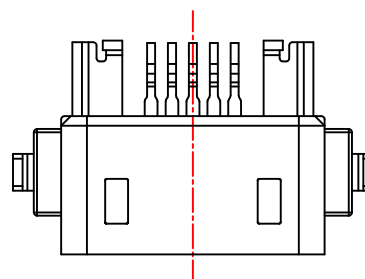



MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

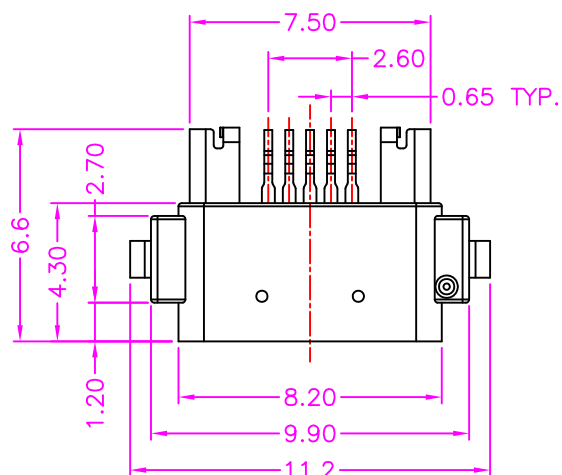

P.C.B. LAYOUT
TOP VIEW ± 0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

WPMIB-SWXFMMRV-5AB-LF

SERIES

FEMALE

90°SMT

REVERSE

METAL FOOT

OFFSET

NON POST

LEADFREE

5 PIN AB TYPE

DESCRIPTION: MICRO USB AB TYPE, PCB MOUNT, WATERPROOF, SMT MID MOUNT REVERSE TYPE, METAL SHIELD, FEMALE