


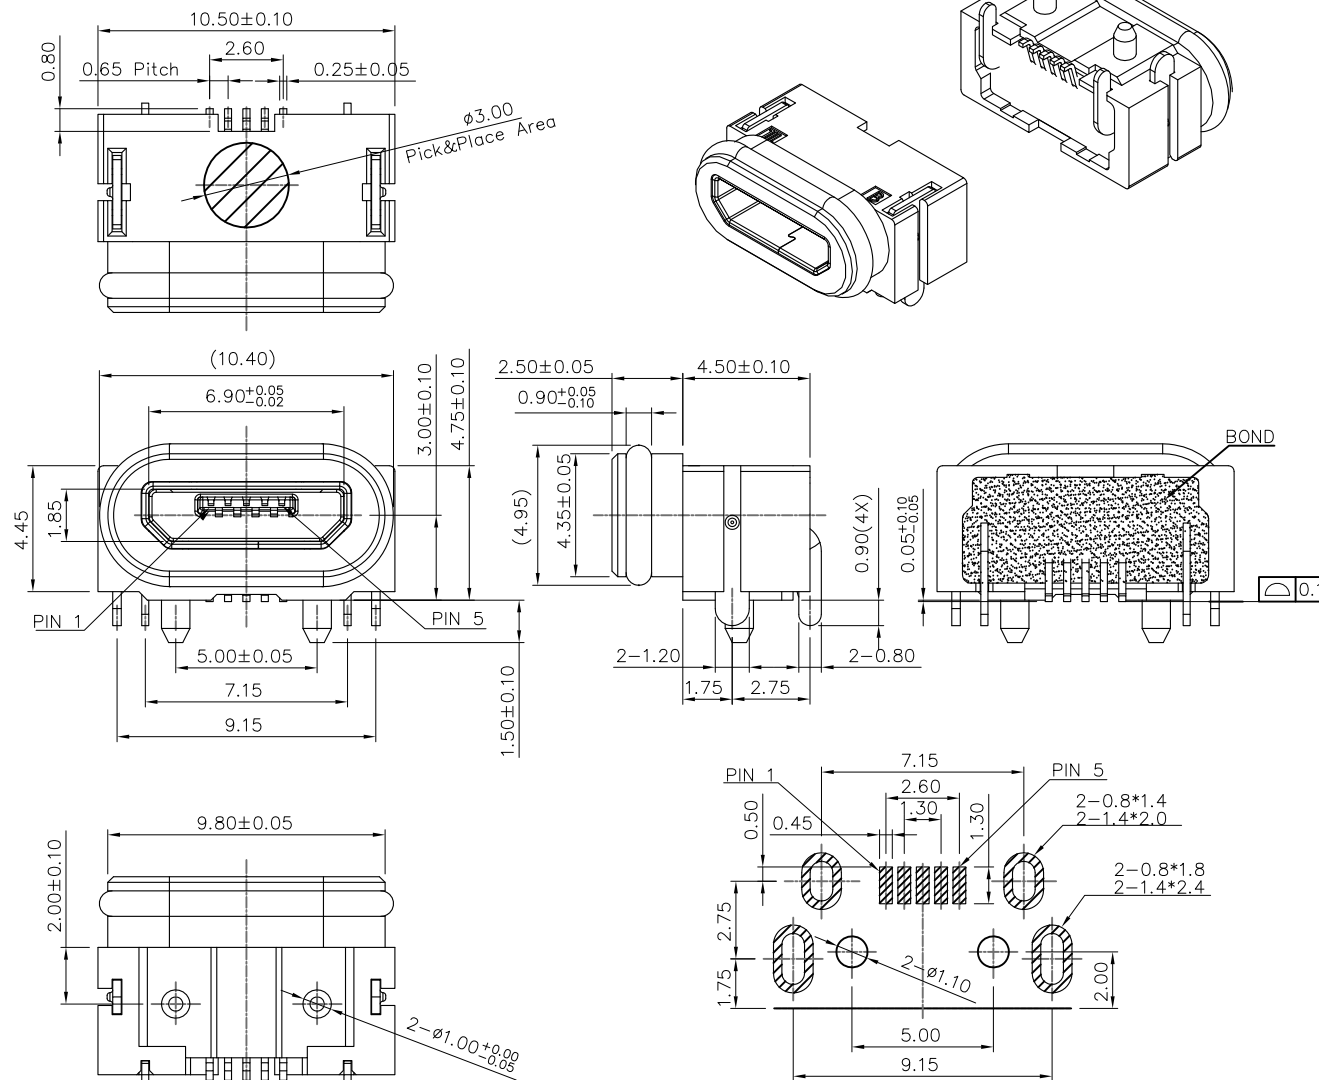

RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05
TOP VIEW

MATERIALS

1. HOUSING : LCP (UL 94V-0) BLACK.
2. COVER : PA9T (UL 94V-0) BLACK.
3. TERMINAL : COPPER ALLOY,
PLATING : GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAILS.
4. SHELL : STEEL,
PLATING : NICKEL PLATED OVERALL.
5. STATOR : SPCC,
PLATING : TIN PLATED OVERALL.

SPECIFICATION

1. CURRENT RATING : 1.8A (PIN1/5), 0.5A (PIN2/3/4)
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30mΩ MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.
6. INSERTION FORCE : 3.6 KGF (MAX)
7. WITHDRAWAL FORCE : 0.8 KGF (Reference)
8. DURABILITY: 10,000 CYCLES .
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X. ± 0.25

UNIT / mm

SCALE 1 : 1

.XX. ± 0.15

DATE

.XXX. ± 0.05

ANG $\pm 3^\circ$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

WPMIB-SWXMMPR-5B-LF

SERIES LEADFREE
5 PIN B TYPE
FEMALE REEL
POST
METAL FOOT
NON EAR

DESCRIPTION: Mirco USB Waterproof Connector

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

