



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 5.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap
5. RoHS Compliant.

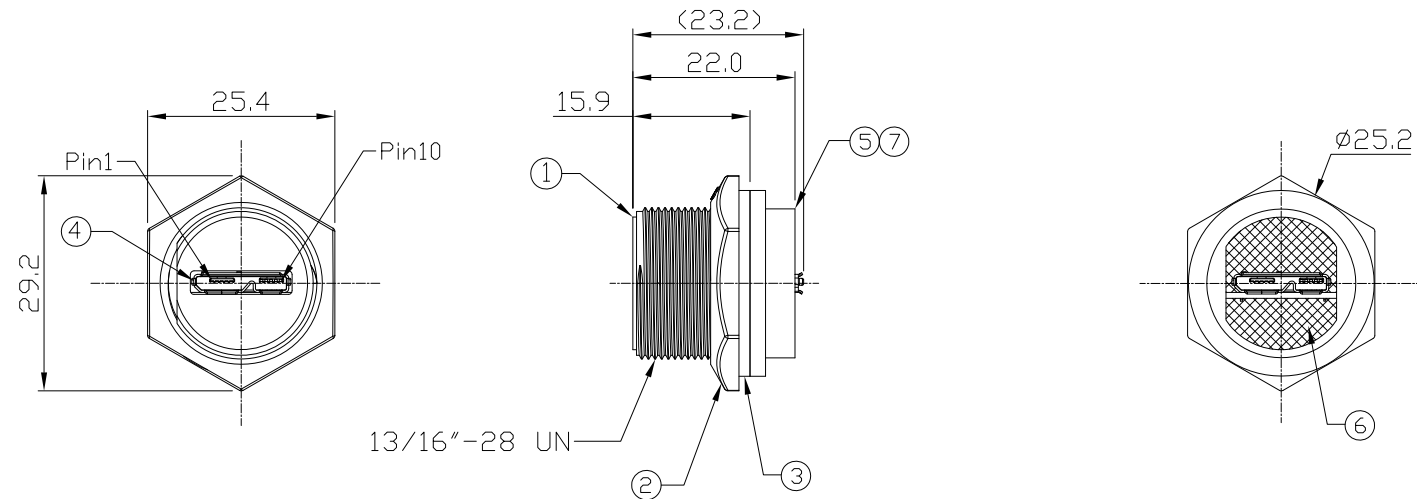

7	Hold	Silicone Color: Black	1
6	Glue	Epoxy Color: Black	1
5	PCB	FR-4 Color: —	1
4	Micro USB-B 3.0 Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	2
3	Gasket	Silicone Color: Black	1
2	Hex Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty



Recommend
Panel Cut-Out

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

WPMIBX2-FSPBNOBKM-10B10B-LF

SERIES

LEADFREE

10 PIN TO 10 PIN B TYPE

METRIC ON

BLACK

RING

NUT

FEMALE TO FEMALE
PANEL BACK

DESCRIPTION: Micro USB-B 3.0 Plastic C3 Panel Jack Screw With Micro USB-B 3.0 Coupler