



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness : 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap
5. RoHS & REACH Compliant.

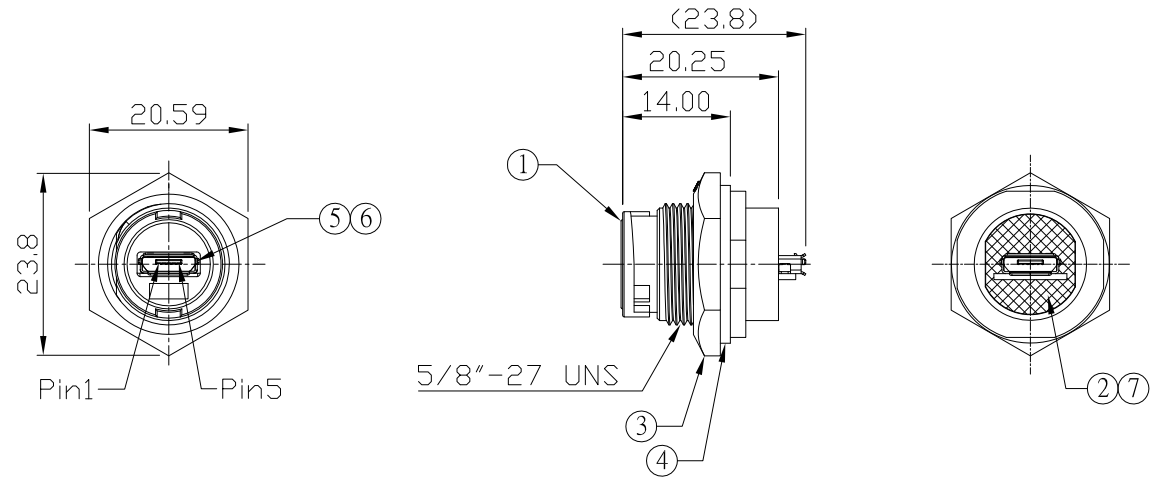

7	Glue	Epoxy Color: Black	
6	Mirco USB-AB Receptacle	Housing: Thermoplastic, Color: Black	2
		Contacts: Copper Alloy, Finish: Au Plated	
		Shell: Copper Alloy, Finish: Sn Plated	
5	PCB	FR-4 Color: -	1
4	Gasket	Silicone Color: Black	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Molding	PVC Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

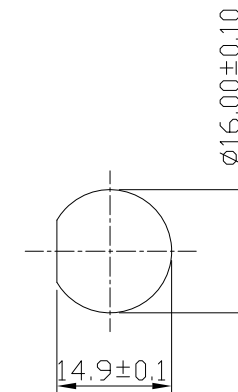

Recommend  
Panel Cut-Out

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±  
.X ± 0.50  
.XX ± 0.20  
.XXX ± 0.05  
ANG ± 1°

PJECTION

照片框

**ORDER INFORMATION**

**WPMIBX2-FSPBNOBKN-5AB5AB-LF**

SERIES | FEMALE TO FEMALE | PANEL BACK | RING NUT | BLACK | SCREW-ON | 5 PIN TO 5 PIN AB TYPE | LEADFREE

DESCRIPTION: Mirco USB-AB Plastic C2 Panel Jack Lock With Mirco USB-AB Coupler