
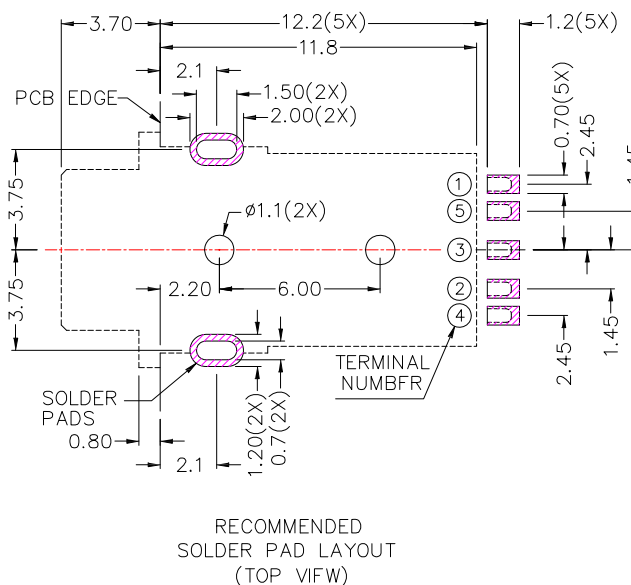


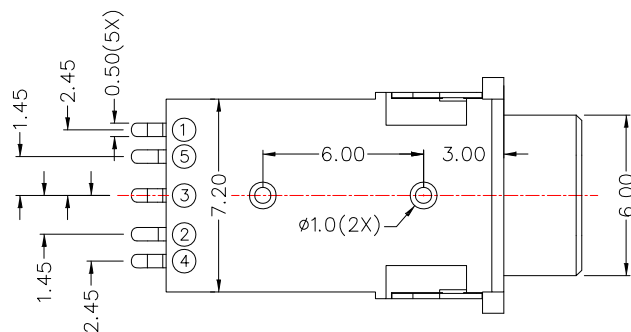


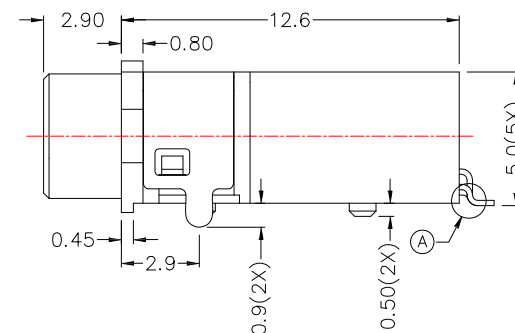
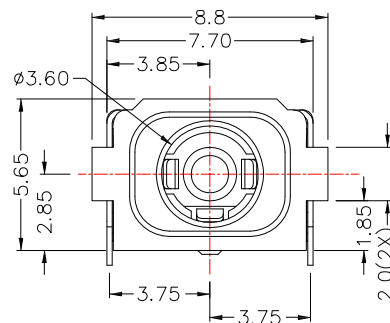


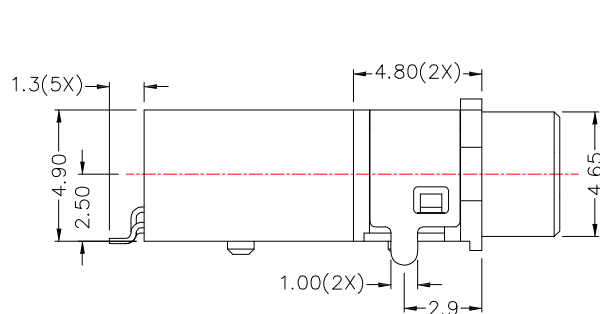

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles
7. Waterproof Lever: IPX7

*MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
 TERMINAL 2 : PHOSPHOR BRONZE
 TERMINAL 3 : PHOSPHOR BRONZE
 TERMINAL 4 : PHOSPHOR BRONZE
 TERMINAL 5 : PHOSPHOR BRONZE
 SHIELD : BRASS
 HOUSING : PA6T
 COVER : PA6T

RoHS Compliant

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

Up to 5 ± 0.2
 Above 5 ~ 15 ± 0.3
 Above 15 ~ 30 ± 0.4
 Above 30 ~ 50 ± 0.5
 Angle $\pm 0.3^\circ$

PPOJECTION


照片框

ORDER INFORMATION

WPPN-JWMP26-05D-LF

SERIES LEADFREE
 5P4C
 METAL FOOT+POST 2.1+6.0mm
 90°SMT
 JACK

DESCRIPTION: 3.5mm PHONE JACK 防水型

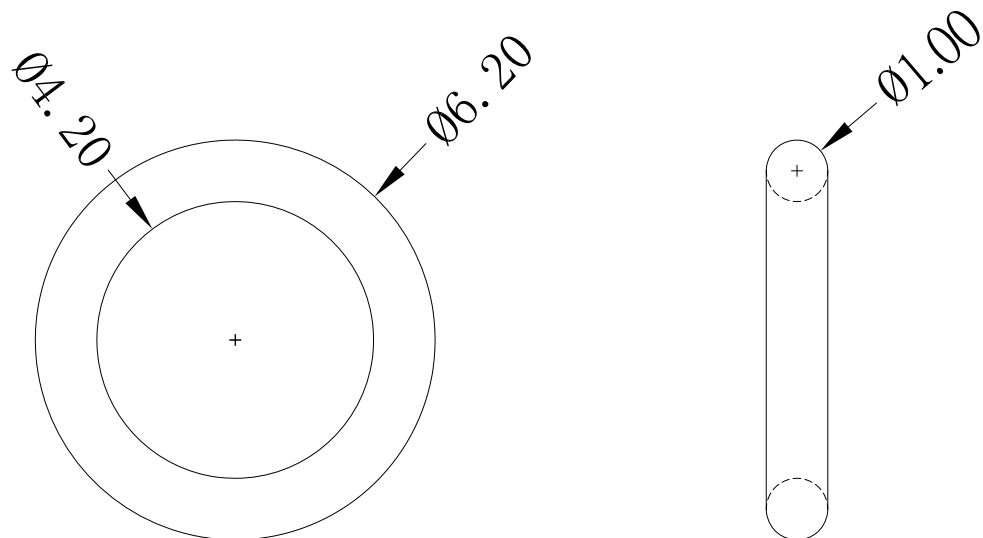

Material: Silicone,UL94V-0

Hardness: 70°

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

ORDER INFORMATION

WPPN-JWMP26-05D-LF

SERIES

JACK

90°SMT

METAL FOOT+POST 2.1+6.0mm

5P4C

LEADFREE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 3.5mm PHONE JACK 防水型