


INTERFACE(FRONT VIEW)



A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								GND
GND								VBUS			
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SIGNAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

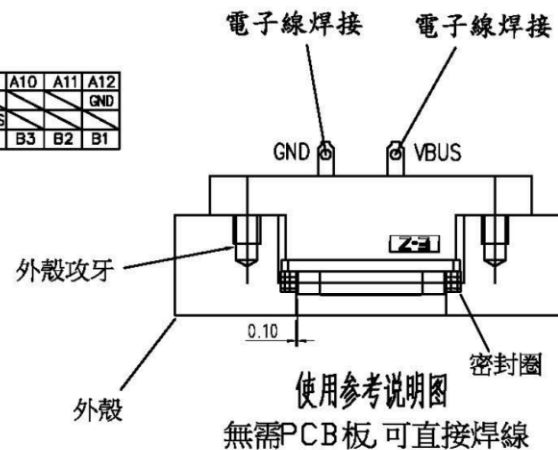

無需PCB板,可直接焊線

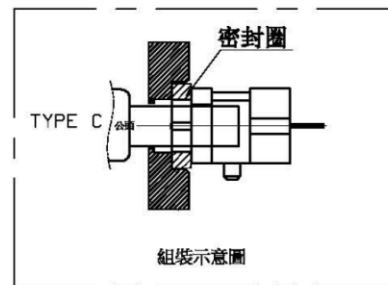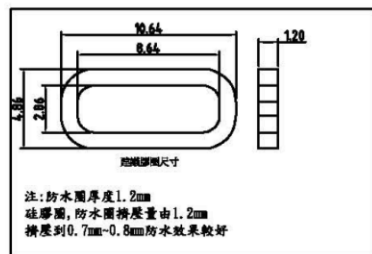

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE:
3. TEMPERATURE RANGE: -30 °C ~
4. CONTACT RESISTANCE: 40 MILLION
5. INSULATION RESISTANCE: 100 ME
6. INSERTION FORCE : 5N~
7. UNMATING FORCE: 8N~2
8. DURABILITY:5000 CYCLES

5	Shell2	1	SUS304 Ni Plating T=0.20mm	Ni40~120u <sup>2</sup>
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni40~120u <sup>2</sup>
3	Housing2	1	LCP(G.F30%)	
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni40~160u <sup>2</sup> Au CONTACT AREA:3u OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PARTNAME	Q'TY	FINISH	NOTE

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.25  
.XXX ± 0.15  
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

WPUB-SSPE-24C02-LF

SERIES | LEADFREE  
24P02C  
PANEL EAR  
SOLDER  
FEMALE

DESCRIPTION: