

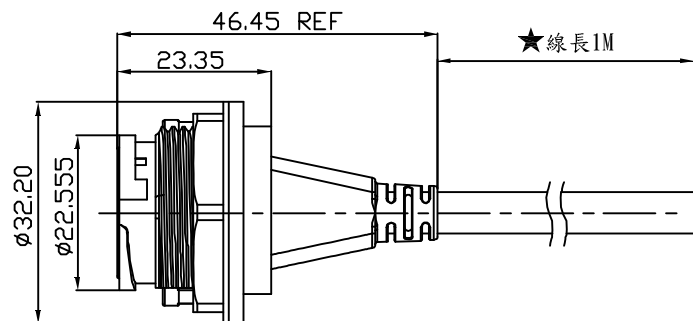


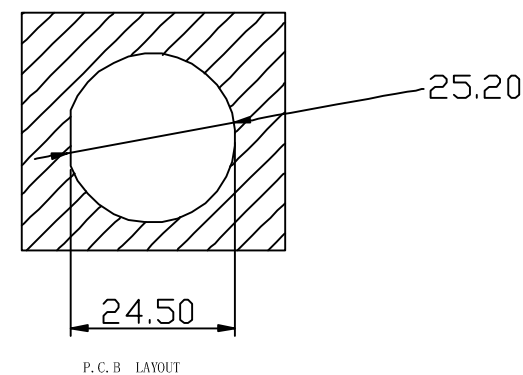

NOTES:

1. CABLE: UL2725 USB 2.0 REV CABLE.(28AWG*1PAIR + 20AWG X 2C), AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE(24AWG), BLACK(TNT-BK) PVC JACKET, OD:4.8±0.1mm.
2. CONNECTOR: USB A TYPE FEMALE, SOLDER TYPE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
3. HOOD: MOLDED 45P PVC BLACK(TNT-BK) PVC.

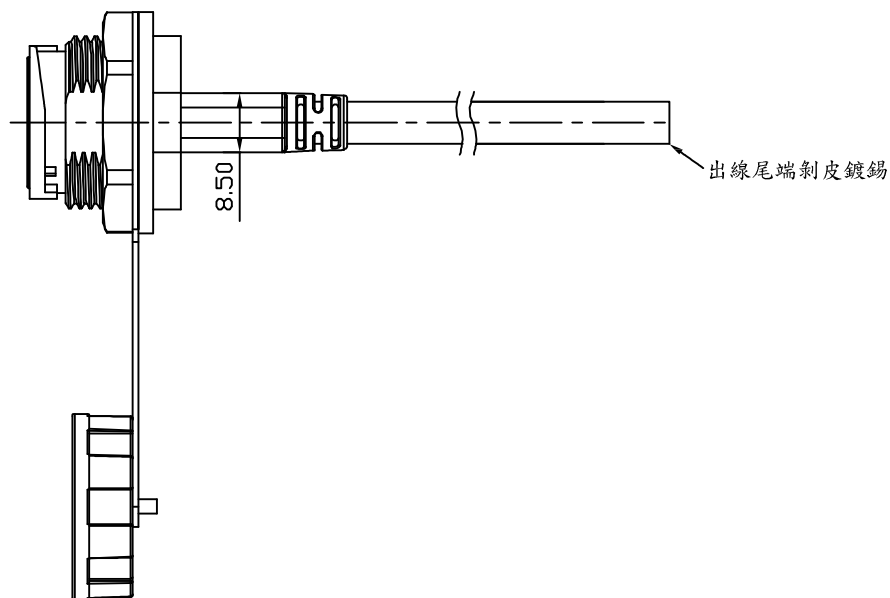

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

WPUBX1-4A002028BKN-F20C

SERIES

200mm
FEMALE
SCREW-ON
BLACK
20/28 AWG
4 PIN A TYPE

DESCRIPTION: AF 防水線