



FRONT VIEW

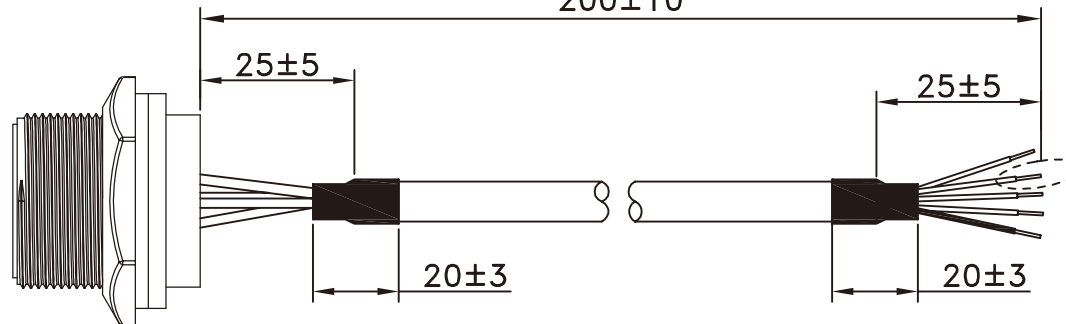

USB B FEMALE PANEL

DETAIL A



DETAIL A

***CONSTRUCTION:

1.CABLE:

* UL2725 28#*1P+24#*2C+AEB 65% OD:5.0mm BLACK JACKET(V:2.0)

***CONNECTORS:

2.USB B/F:

- * USB B TYPE FEMALE PANEL SOLDER TYPE.
- * PINS: 30u GOLD PLATED OVER NICKEL.
- * INSULATOR: BLACK COLOR P.B.T UL 94V-0 RATED.
- * SHELL: STEEL WITH NICKEL PLATED.

3.SHRINK TUBE:

* $\phi 1.5$ & $\phi 6.0$ mm BLACK.

4.TEST:

* CT: 2 ohm IS: 5M ohm.


5.PACKING:

* PACK EACH CABLE IN A POLY BAG.

6.MATERIAL:

* MATERIAL WITH RoHS GRADE.

PIN OUT

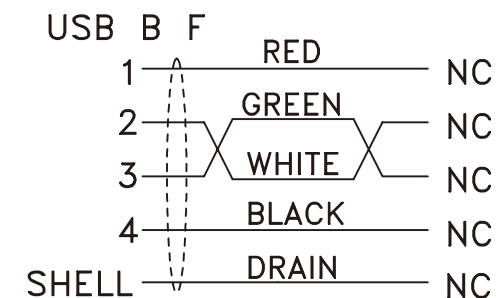

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

WPUBX1-4B002428BKN-F20C

SERIES

200mm

FEMALE


SCREW-ON

BLACK

24/28 AWG

4 PIN B TYPE

DESCRIPTION: USB B TYPE PANEL FEMALE TO OPEN

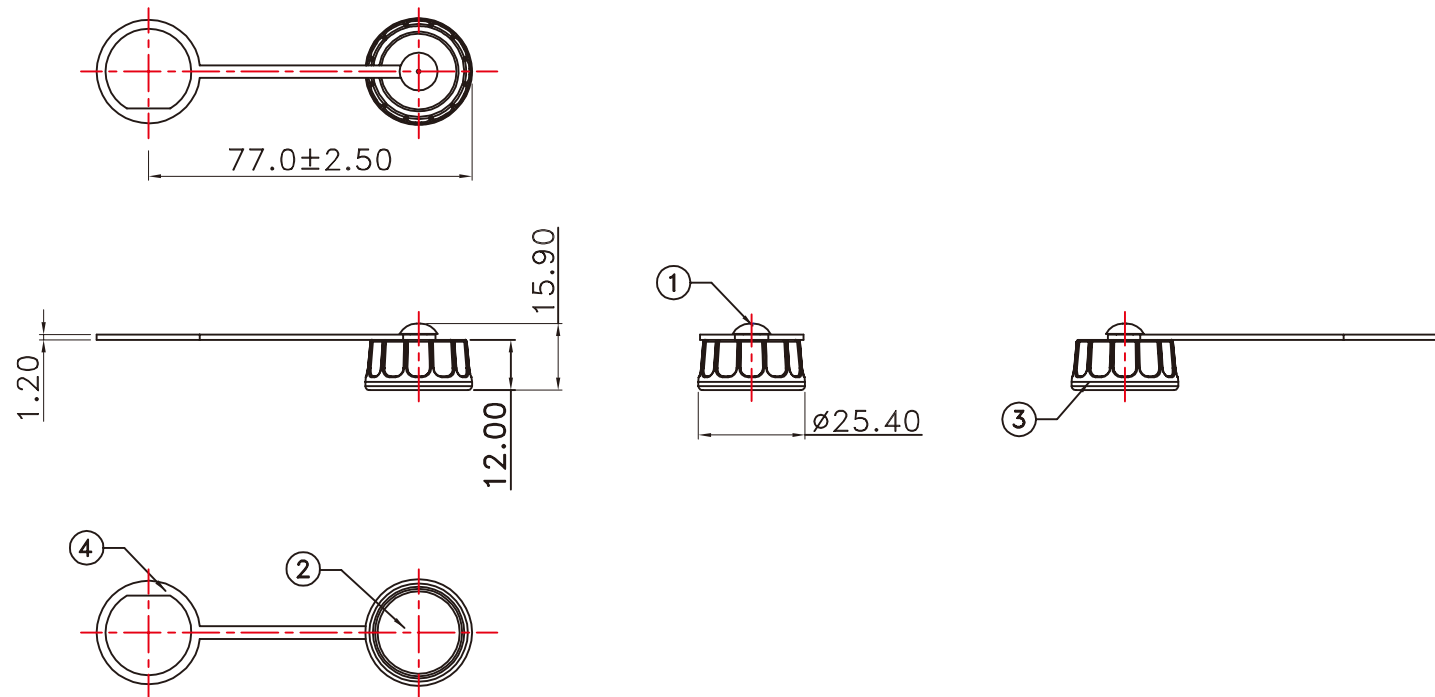

****NOTES:**

1. THERMAL PLASTIC BLACK COLOR.
2. SILICON BLACK COLOR.
3. THERMAL PLASTIC BLACK COLOR.
4. SILICON BLACK COLOR.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

WPUBX1-4B002428BKN-F20C

SERIES

200mm
FEMALE
SCREW-ON
BLACK
24/28 AWG

DESCRIPTION: SCREW CAP (FOR PANEL) NUT WITH RUBBER CHAIN