


## Features:

- 2 ~ 15 circuits available
- Material: Glass-filled PA 66, UL 94V-0
- Pin: Brass
- .024"(0.6mm) round pin



## Specification:


- Current rating: 3A AC, DC ( #20, #22 AWG )
- Voltage rating: 250V AC, DC
- Contact resistance: Initial value/10mΩ Max.

After environmental testing/20mΩ Max.

- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C ~ 85°C

(including temperature rise in applying electrical current)

- Applicable P. C. board thickness: .063"(1.6mm)


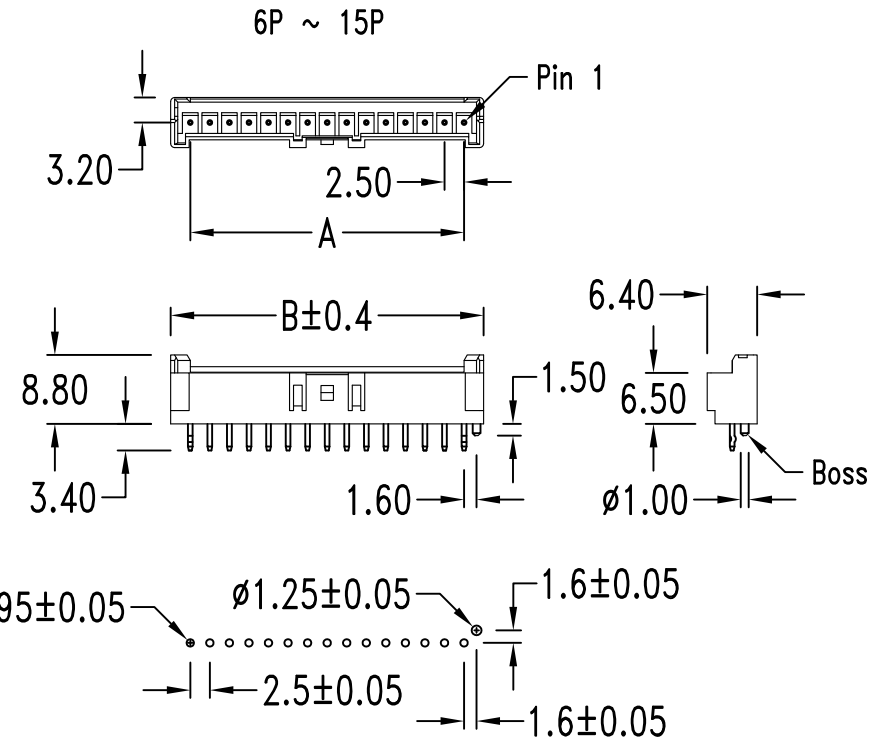


P. C. board hole dimensions

### Dimensional Information ( mm )

Circuits	Dim. A	Dim. B
N	2.5 x ( N - 1 )	A + 5

&& N = 2 ~ 15

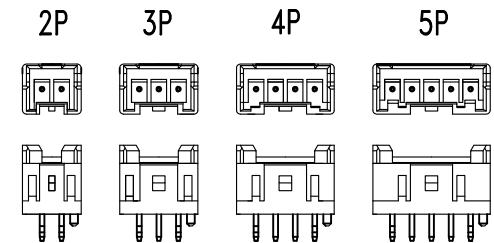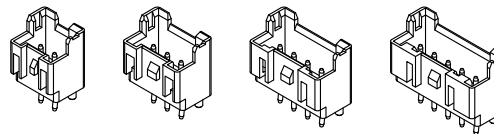

### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
.X ± 0.40  
.XX ± 0.25  
.XXX ± 0.08  
ANG ±

照片框

### ORDER INFORMATION

XA-DP-xx-LF  
SERIES | LEADFREE  
02~15 WAY  
POST  
DIP 180°

DESCRIPTION:

www.morethanall.com