

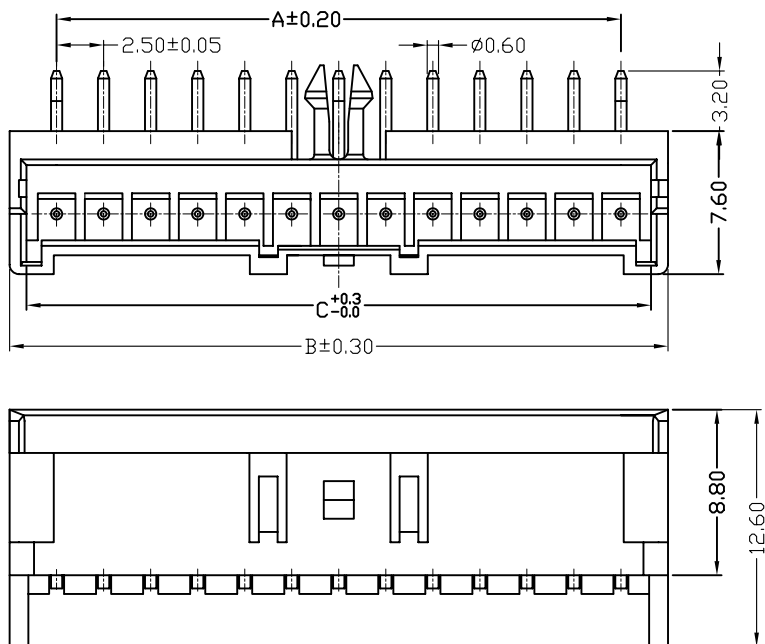




*打K位置：2P~11P打頭尾PIN,12P以上(包含12P)除打頭尾PIN外，奇數打中間PIN，偶數打中間2PIN.

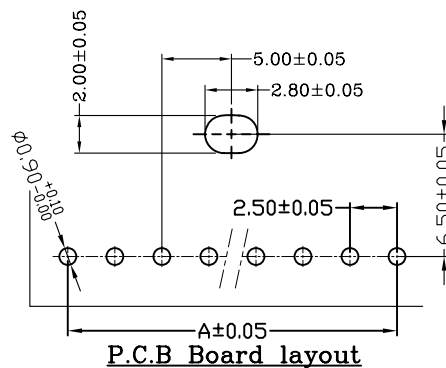

NOTES:

- ①Material:Nylon66 UL 94V.(NATURAL)
 - ②Material: COPPER ALLOY
- SURFACE FINISH: COPPER-UNDERPLATED
MATTE TIN -PLATED

Dimensional & Ordering Information:

Circuits	Part No.	Dimensions			Pcs/Bag
		A	B	C	
2	XA-RP-02	2.5	7.5	5.7	1000
3	XA-RP-03	5.0	10.0	8.2	1000
4	XA-RP-04	7.5	12.5	10.7	1000
5	XA-RP-05	10.0	15.0	13.2	1000
6	XA-RP-06	12.5	17.5	15.7	1000
7	XA-RP-07	15.0	20.0	18.2	500
8	XA-RP-08	17.5	22.5	20.7	500
9	XA-RP-09	20.0	25.0	23.2	500
10	XA-RP-10	22.5	27.5	25.7	500
11	XA-RP-11	25.0	30.0	28.2	500
12	XA-RP-12	27.5	32.5	30.7	500
13	XA-RP-13	30.0	35.0	33.2	500
14	XA-RP-14	32.5	37.5	35.7	500
15	XA-RP-15	35.0	40.0	38.2	500

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

XA-RP-xx-LF
SERIES POST
LEADFREE
02~15WAY
DIP 90°

DESCRIPTION: