

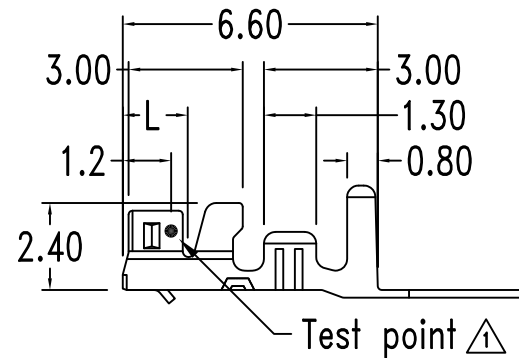



Features:

- Material: Phosphor bronze
- Wire range: AWG #20 ~ #28
- Thickness: 0.2mm

Specification:

- Current rating: 3A AC, DC ( #20、#22 AWG )
- Voltage rating: 250V AC, DC
- Contact resistance: Initial value/10mΩ Max.  
After environmental testing/20mΩ Max.
- Dielectric withstanding voltage: 1000V AC/minute
- Ambient temperature range: -25°C ~ 85°C  
(Including temperature rise)

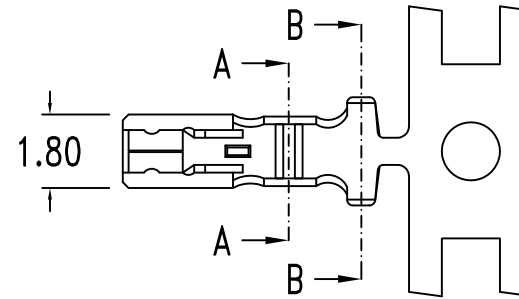

Ordering & Dimensional Information (mm)

Part No.	Finished	Wire size (AWG)	Dim. a	Dim. b
XA-T-22	Tin-plated	#22 ~ #28	1.8	1.5
XA-T-20	Tin-plated	#20 ~ #24	2.0	2.0

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ± 0.40  
.XX ± 0.25  
.XXX ± 0.08  
ANG ±

PJECTION

照片框

ORDER INFORMATION

XA-T-xx-LF  
SERIES | LEADFREE  
22:22~28 AWG  
20:20~24 AWG  
TERMINAL

DESCRIPTION: .098"(2.5mm) Crimp Terminal