


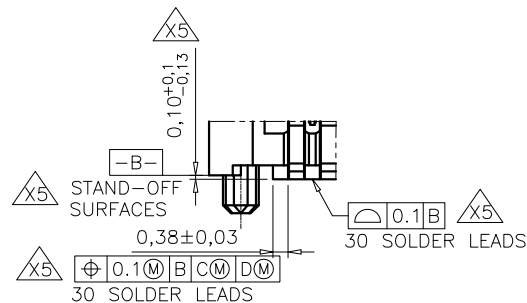
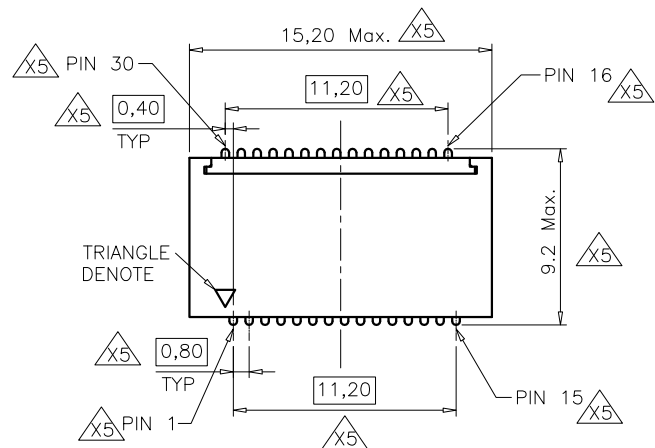


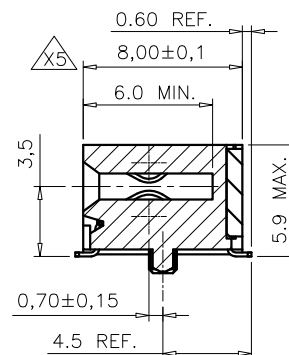

View B
Scale 2:1

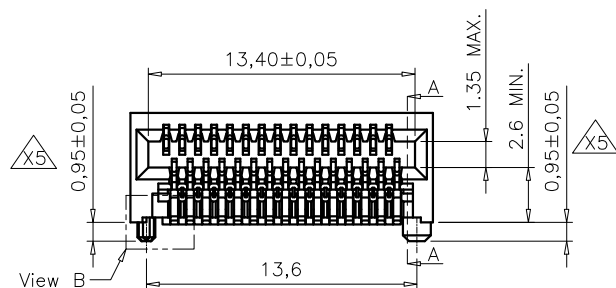

SEC. A-A

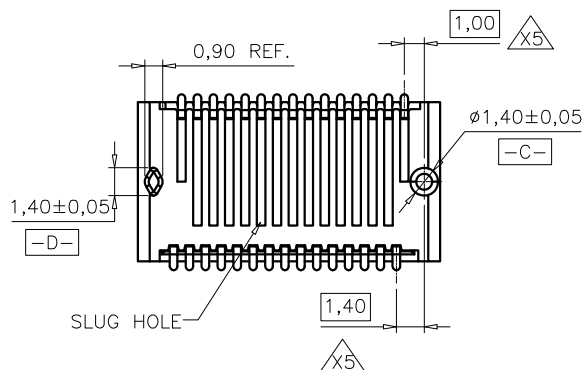


NOTES:
ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING: 0.5 Amps Max.
VOLTAGE RATING: 30 Volts AC (RMS)/DC Max.
CONTACT RESISTANCE: ΔR 10 MILLIOHMS Max.
FOR SIGNAL CONTACTS
DIELECTRIC WITHSTANDING VOLTAGE: 300V AC

MATERIALS
CONTACTS: COPPER ALLOY
HOUSING: HIGH TEMPERATURE THERMOPLASTIC 94V-0, NATURAL COLOR

FINISH:
OPTION 1:
CONTACT ARER: 15u" MIN GOLD OVER 50u" MIN NICKEL
SOLDER ARER: 100u" MIN TIN OVER 50u" MIN NICKEL
OPTION 2:
CONTACT ARER: 30u" MIN GOLD OVER 50u" MIN NICKEL
SOLDER ARER: 100u" MIN TIN OVER 50u" MIN NICKEL

ENVIRONMENT
OPERATION TEMPERATURE: -20°C TO +85°C



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SIZE A4

SCALE 1:1

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ± 1°


PPOJECTION

照片框


ORDER INFORMATION

XFP-SWP-30-LF
SERIES | | LEADFREE
30 WAY
POST
90°SMT
FEMALE

DESCRIPTION:

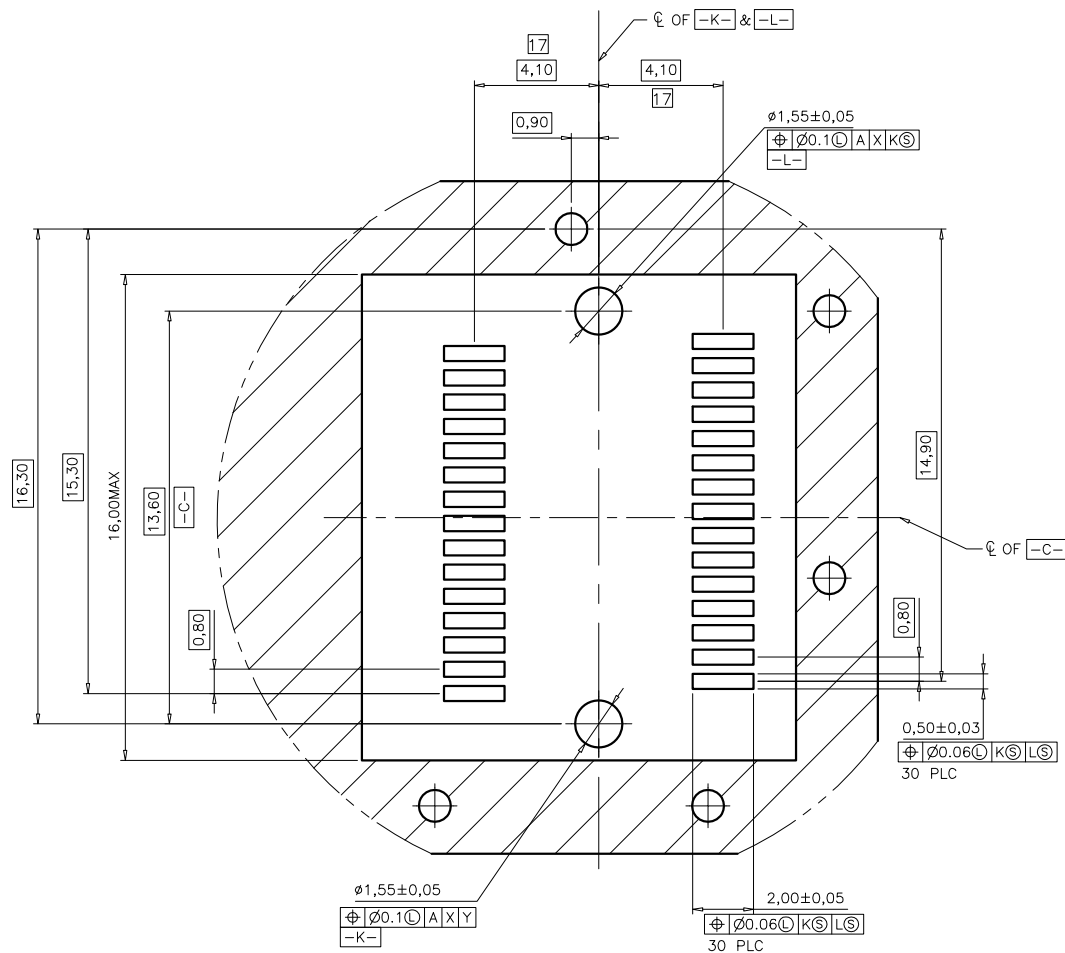

RECOMMENDED PCB LAYOUT CONNECTOR MOUNTING SIDE
SCALE 2:1

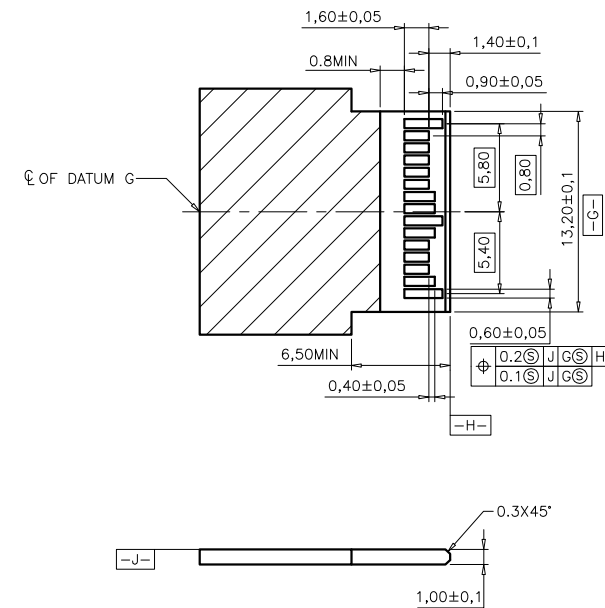

Recommended Pattern Layout for XFP Printed Circuit
SCALE 1:1

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ± 1°

照片框

ORDER INFORMATION

XFP-SWP-30-LF
SERIES T T LEADFREE
30 WAY
POST
90°SMT
FEMALE

DESCRIPTION: