

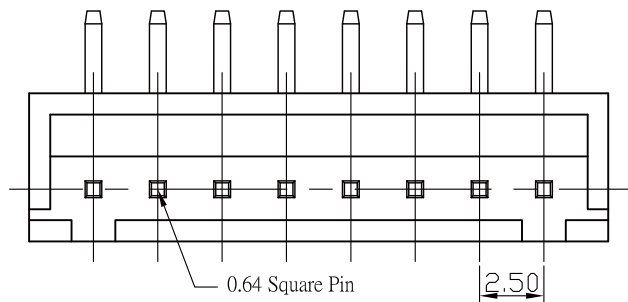
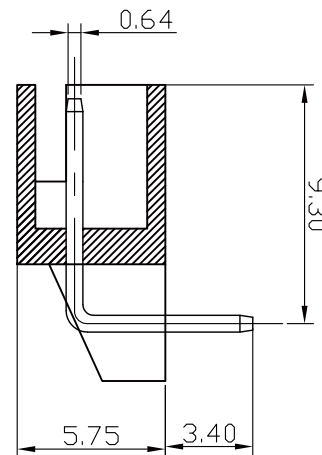


Specifications

Current Rating: 3A AC, DC
Voltage Rating: 250V AC Maximum
Operating Temp: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Terminal Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0+GF

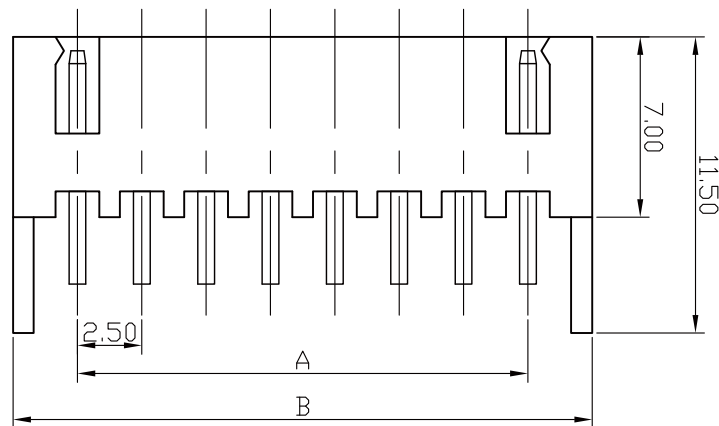

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	2.50 (0.098)	7.50 (0.295)	XH-R-02	
3	5.00 (0.197)	10.00 (0.394)	XH-R-03	
4	7.50 (0.295)	12.50 (0.492)	XH-R-04	
5	10.00 (0.394)	15.00 (0.591)	XH-R-05	
6	12.50 (0.492)	17.50 (0.689)	XH-R-06	
7	15.00 (0.591)	20.00 (0.787)	XH-R-07	
8	17.50 (0.689)	22.50 (0.886)	XH-R-08	
9	20.00 (0.787)	25.00 (0.984)	XH-R-09	
10	22.50 (0.886)	27.50 (1.802)	XH-R-10	
11	25.00 (0.984)	30.00 (1.181)	XH-R-11	
12	27.50 (1.802)	32.50 (1.280)	XH-R-12	

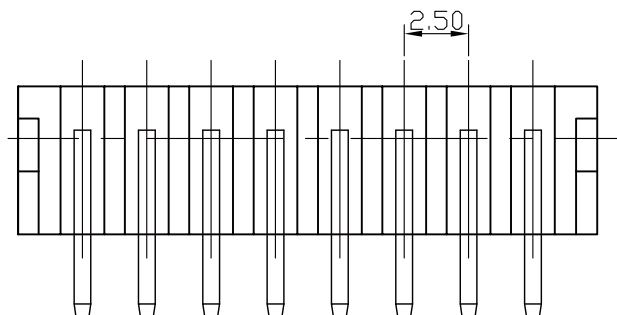

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

XH-R-xx-LF
SERIES | LEADFREE
02~12WAY
DIP 90°

DESCRIPTION: 2.5mm Wire-to-Board Header DIP 90° Type