

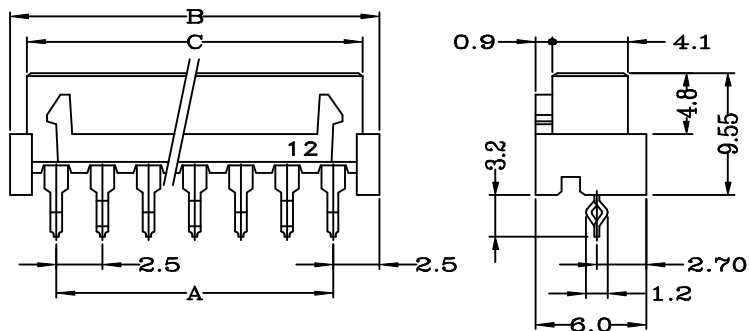


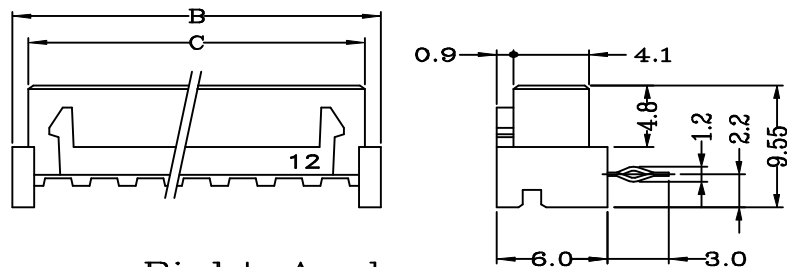


Straight angle

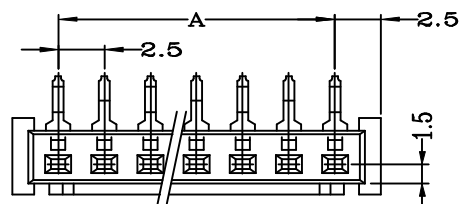

Right Angle

Features:

- * Available in 3 through 15 circuits
- * Material: Insulator: Nylon 66 UL 94V-0
Contact: Phosphor Bronze, tin plated
- * Box-shaped shrouded



Dimensional & Ordering Information:

Circuits	Part No		Dimensions			PCS/BOX
	Straight angle	Right Angle	A	B	C	
3	XH-SD-03	XH-SR-03	5.00	10.00	8.20	500
4	XH-SD-04	XH-SR-04	7.50	12.50	10.70	500
5	XH-SD-05	XH-SR-05	10.00	15.00	13.20	500
6	XH-SD-06	XH-SR-06	12.50	17.50	15.70	500
7	XH-SD-07	XH-SR-07	15.00	20.00	18.20	250
8	XH-SD-08	XH-SR-08	17.50	22.50	20.70	250
9	XH-SD-09	XH-SR-09	20.00	25.00	23.20	250
10	XH-SD-10	XH-SR-10	22.50	27.50	25.70	250
11	XH-SD-11	XH-SR-11	25.00	30.00	28.20	200
12	XH-SD-12	XH-SR-12	27.50	32.50	30.70	200
13	XH-SD-13	XH-SR-13	30.00	35.00	33.20	200
14	XH-SD-14	XH-SR-14	32.50	37.50	35.70	100
15	XH-SD-15	XH-SR-15	35.00	40.00	38.20	100

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

XH-Sx-xx-LF
SERIES | LEADFREE
03~15 WAY
D: DIP 180°
R: DIP 90°
FEMALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com