


Features:

- Material: Phosphor bronze
- Wire range: #22 ~ #28 AWG
- Thickness: 0.2mm



Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: Initial value/10m Ω Max.
After environmental testing/20m Ω Max.
- Dielectric withstanding voltage: 1000V AC/minute
- Terminal retention force: 1.5Kg Min.
- Crimp strength:

Wire size	#22	#24	#26	#28
Kg (Min.)	4.0	3.0	2.0	1.0
- Ambient temperature range: -25°C ~ 85°C
(Including temperature rise)

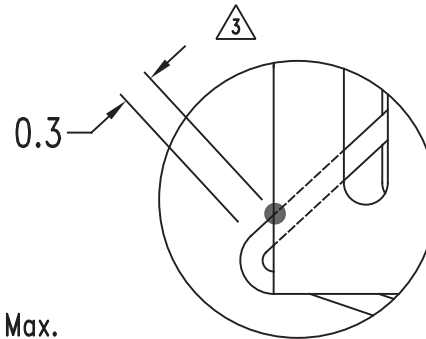

Detail A
Scale 3:1

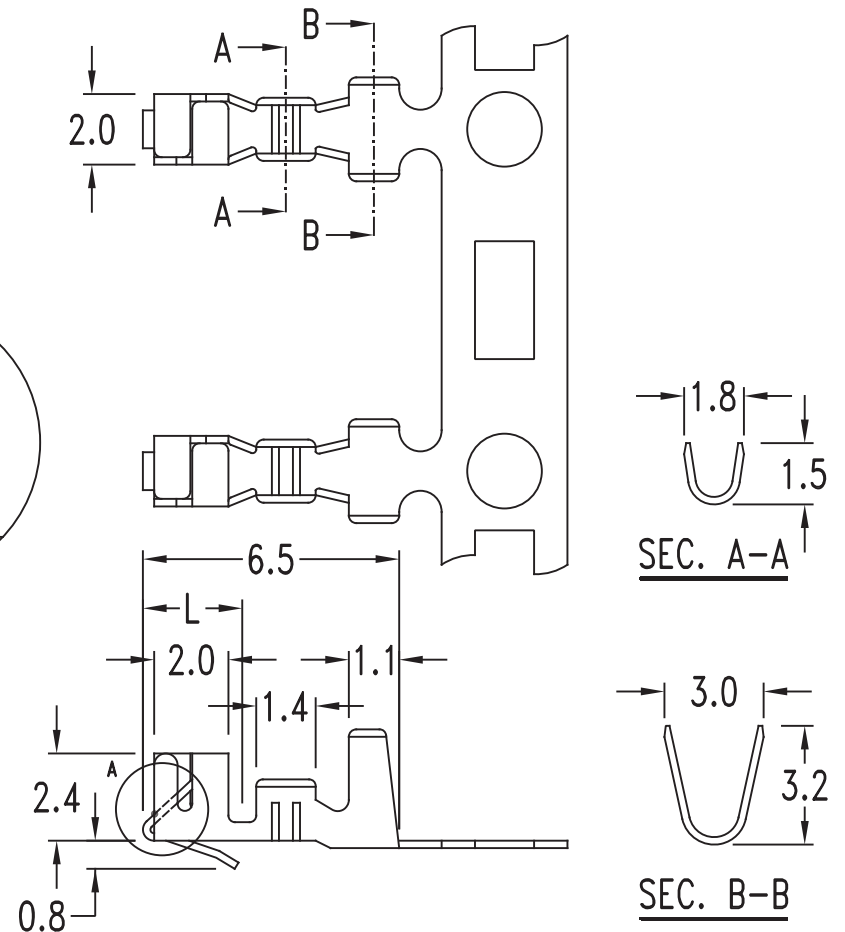

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.40
.XX $\pm$ 0.25
.XXX $\pm$ 0.08
ANG $\pm$

照片框

ORDER INFORMATION

XH-T-22-LF
SERIES | T | LEADFREE
22~28 AWG
TERMINAL

DESCRIPTION: .098" (2.5mm) Crimp Terminal