


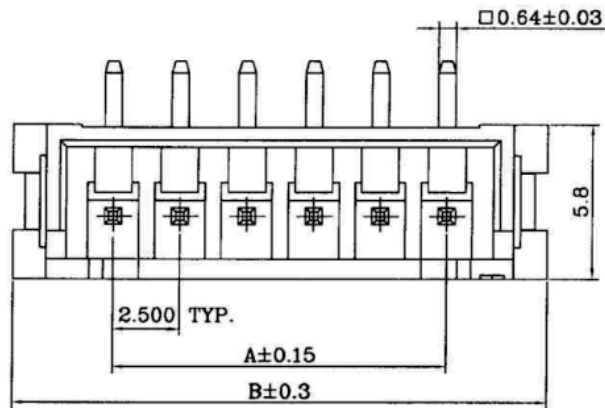

DIMENSIONS:

CIRCUITS	DIM.A	DIM.B
2	2.5	10.0
3	5.0	12.5
4	7.5	15.0
5	10.0	17.5
6	12.5	20.0
7	15.0	22.5
8	17.5	25.0
9	20.0	27.5
10	22.5	30.0
11	25.0	32.5
12	27.5	35.0
13	30.0	37.5
14	32.5	40.0
15	35.0	42.5

NOTES:




1. MATERIAL:

- ① BASE: NYLON 9T ,94V-0
- ② PIN: BRASS, PLATING FOLLOW ORDERING INFORMATION.
- ③ PEG: BRASS, MATTE TIN-PLATED

2. CIRCUITS: 2PIN ~ 15PIN.

3. MATES WITH 2500S SERIES HOUSING

4. PACKING: 250 PCS PER 13" DIA. REEL TAPING PANEL.

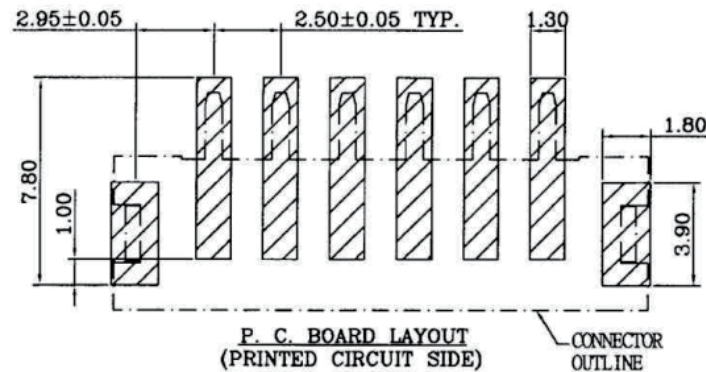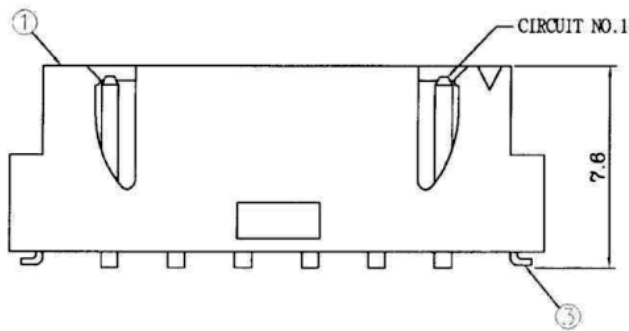

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框


ORDER INFORMATION

XH-VR-xx-LF
SERIES | LEADFREE
02~15WAY
REEL
180°SMT

DESCRIPTION:

TABLE.A TAPING REEL (BOM PER 13" REEL):

CIRCUITS	DIM.D	DIM.E	DIM.F
2 ~ 3 PIN	25.5	24.0	---
4 ~ 5 PIN	33.5	32.0	28.40
6 ~ 10 PIN	45.5	44.0	40.40
11 ~ 15 PIN	57.5	56.0	52.40

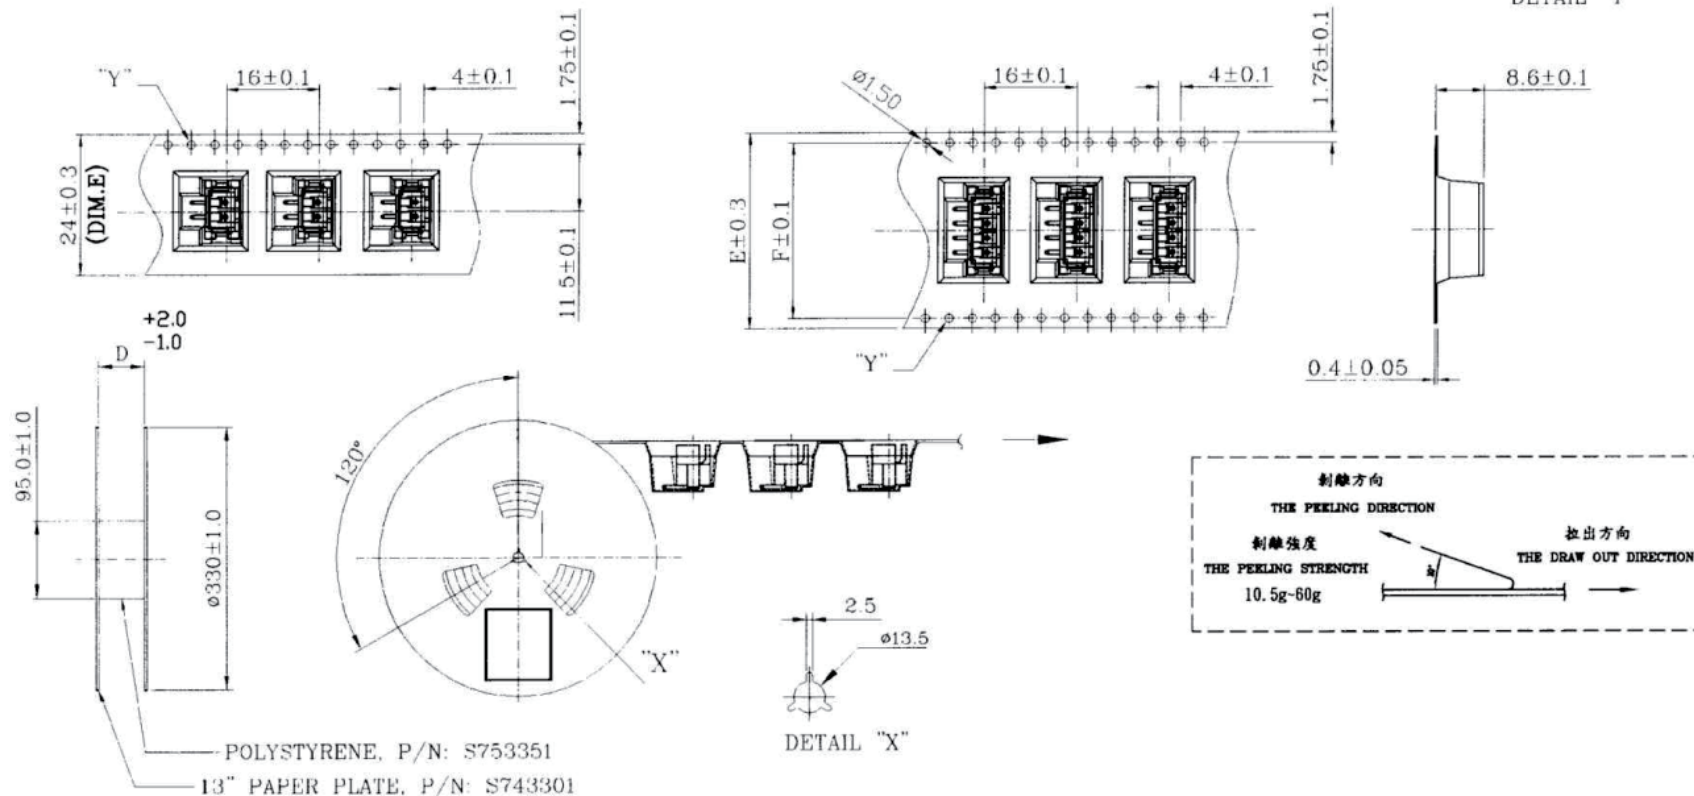

- NOTES: 1 Pitch Tolerance Over Any 10 Pitch ± 0.20 .
 2 Material : PS Black-Thickness : 0.4 ± 0.05 .
 3 Component Load Per 13" Reel : 500 Pcs.
 4 All dimension meet EIA-481-B requirements.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

XH-VR-xx-LF
 SERIES | LEADFREE
 02~15WAY
 REEL
 180°SMT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION

X, $\pm$
 X, $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

DESCRIPTION: