
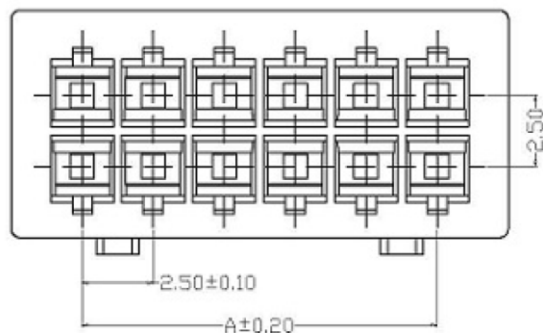
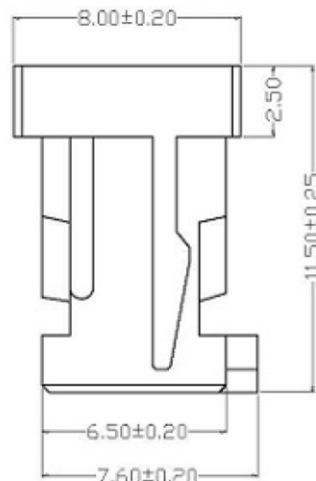
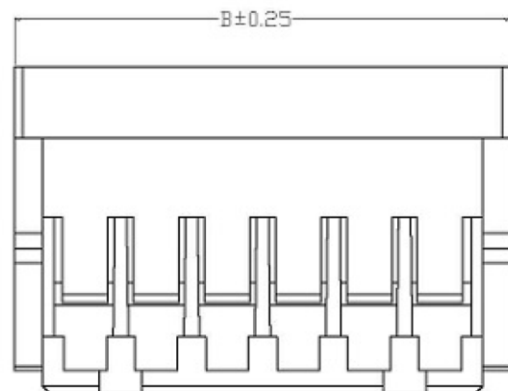


SPECIFICATIONS

- 1、 Current Rating: 3A AC, DC
- 2、 Voltage Rating: 250V AC, DC
- 3、 Temperatuer Range: -25°C~+85°C
- 4、 Contact Resistance: 30mΩ Max
- 5、 Insulation Resistance: 1000MΩ Min
- 6、 Withstanding Voltang: 800V AC/minute
- 7、 Material:Housing PA66, UL94V-0

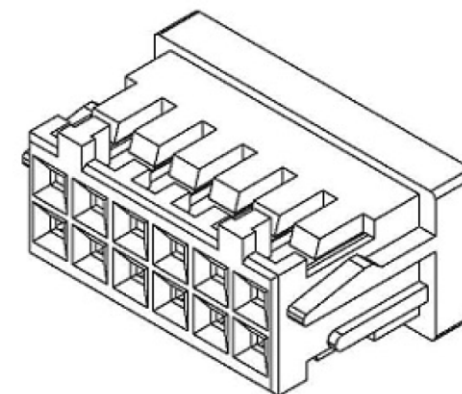

编 号	尺寸 (mm)	
	A	B
XHD-H-04	2.50	7.50
XHD-H-06	5.00	10.00
XHD-H-08	7.50	12.50
XHD-H-10	10.00	15.00
XHD-H-12	12.50	17.50
XHD-H-14	15.00	20.00
XHD-H-16	17.50	22.50
XHD-H-18	20.00	25.00
XHD-H-20	22.50	27.50
XHD-H-22	25.00	30.00
XHD-H-24	27.50	32.50
XHD-H-40	47.50	52.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

XHD-H-xx-LF
SERIES | LEADFREE
04~40WAY
HOUSING

DESCRIPTION: