


WIRE MAP

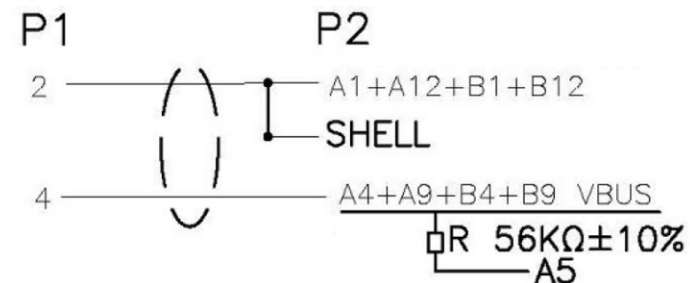

⑥	∅3.5MM*15MM BLACK	1
⑤	PVC 45P BLACK	AR
④	PITCH: XH 2.5 mm 1*4PIN HOUSING COLOR: WHITE	1
③	PITCH: XH 2.5 mm CONTACT TIN-PLATED	2
②	USB 2.0 Type-C MALE, CONTACT: GOLD FLASH. Nickle Plated	1
①	Cable: 2464 24AWGx2C OD3.5mm jacket(沒印字) L=610mm black	1
NO.	DESCRIPTION	Q'TY

ELECTRICAL PROPERTIES:

- 1 Contact Resistance: 3ohm MAX
- 2 Insulation Resistance: 5Mega ohm MIN
- 3 Hi-Pot: 300V DC/0.10s

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

XHUB-0424C24-A60C-LF

SERIES | | | LEADFREE
600mm
FEMALE TO MALE
2.4C
04 TO 24 WAY

DESCRIPTION: