


NOTES: 1. A端棕色線需剪掉。  
 2. B端紅、綠、白、黑、藍芯線從外被處量起比剪為30mm, 脫皮2. 6.  
 3. B端棕色芯線脫皮6mm, 沾錫后再打端子。

NO	ITEM	Q' TY	DESCRIPTION	REMARK
1	CABLE	1pcs	UL2464 #22*3PR(BLACK/WHITE;BLUE/RED; BROWN/GREEN)+AL JACKET COLOR=GRAY OD:6.0	CHINGLUNG OR EQ
2	HOUSING	2pcs	XH-H-05	JWT OR EQ
3	TERMINAL	10pcs	XH-T-22	"
4	TERMINAL	1pcs	RVL1-3.7	KS OR EQ
5	H. S. TUBE	2pcs	6.0 $\phi$ *20mm BLACK F32	
6	LABEL	1pcs	WHITE GROUND BLACK PRINTING	
7				

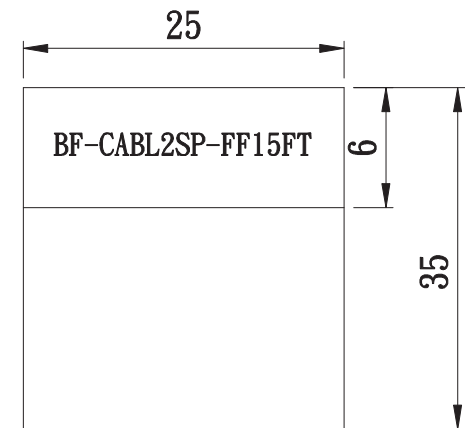

RoHS Compliant

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

PART NO. XHX2-0505R1RT-FN15F

DWG NO. XHX2-0505R1RT-FN15F

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X $\pm$ 0.2  
 .XX $\pm$   
 .XXX $\pm$   
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司