


NOTES: 1. A端棕色線需剪掉。
 2. B端紅、綠、白、黑、藍芯線從外被處量起比剪為30mm, 脫皮2.6。
 3. B端棕色芯線脫皮6.5mm, 沾錫后再打端子。

NO	ITEM	Q' TY	DESCRIPTION	REMARK
1	CABLE	1pcs	UL2464 #22*3PR(BLACK/WHITE;BLUE/RED; BROWN/GREEN)+AL JACKET COLOR=GRAY OD:6.0	CHINGLUNG OR EQ
2	HOUSING	2pcs	XH-H-05	JWT OR EQ
3	TERMINAL	10pcs	XH-T-22	"
4	TERMINAL	1pcs	SNYBLL1-3.7	KS OR EQ
5	H. S. TUBE	2pcs	6.0ø*20mm BLACK F32	
6	LABEL	1pcs	WHITE GROUND BLACK PRINTING	
7				

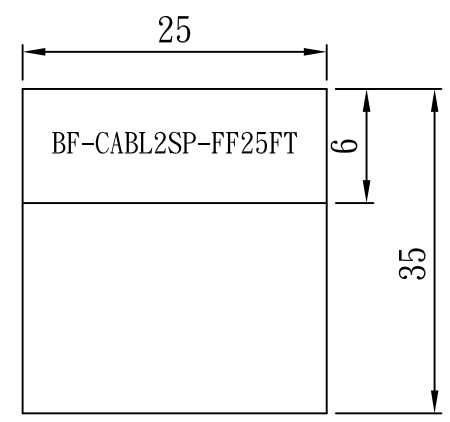

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫股份有限公司

PART NO. XHX2-0505R1YT-FN25F	
DWG NO. XHX2-0505R1YT-FN25F	
FILE NO.	
UNIT / mm	SCALE 1:1

CHECKED BY CY	
DRAWING BY	
PROJECTION	

RoHS Compliant

TOLERANCES ARE
.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:				
AREA	REVISIONS	HK	DATE	