


Features:

- UL 94V-0 nylon 66
- Tin-plated brass pin
- .025"(0.64mm) square pin

Specification:

- Voltage Rating: 250V AC, DC
- Current Rating: 3A AC, DC
- Contact Resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Dielectric Withstanding Voltage: 1000V AC/minute
- Ambient Temperature Range: -25°C ~ 85°C
(including temperature rise)
- Applicable P.C. board thickness: .063"(1.6mm)

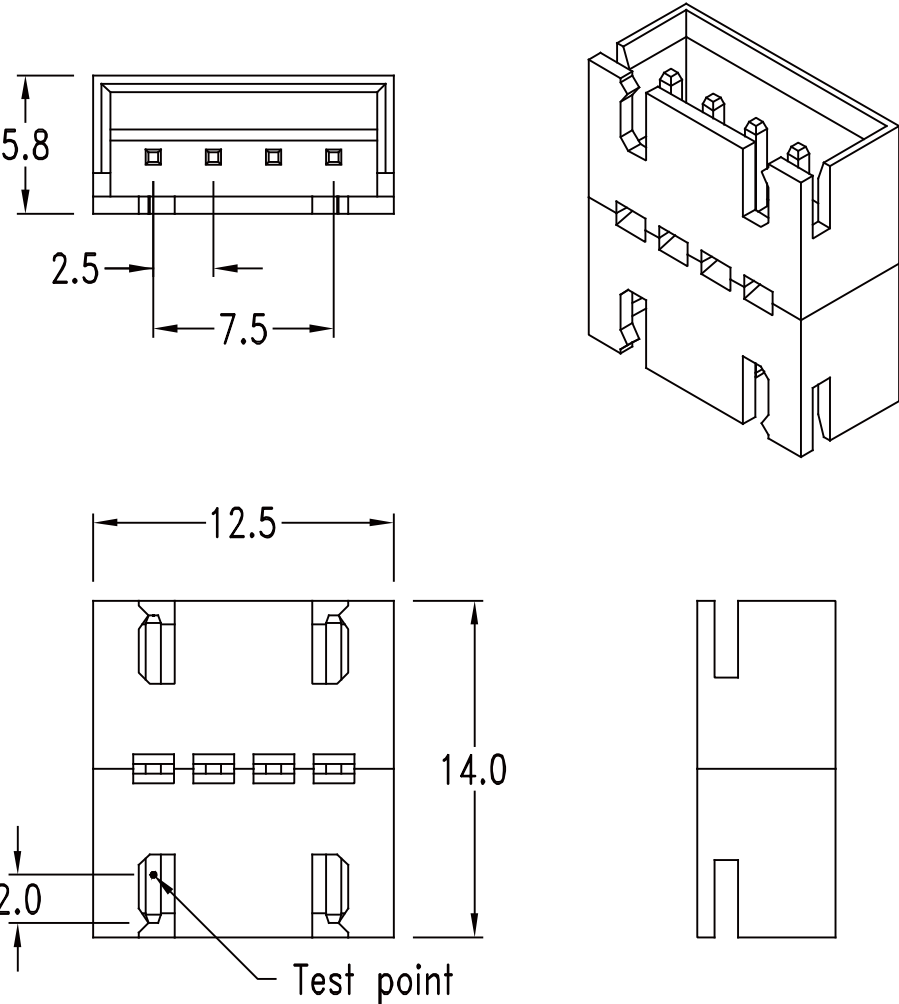

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ±
ANG ±

照片框

ORDER INFORMATION

XHX2-MS-xxxx-LF

SERIES

LEADFREE

0202:02 TO 02 WAY

1212:12 TO 12 WAY

SLIM

MALE TO MALE

DESCRIPTION: 2.5mm Wire-to-Board Header DIP 180° Type Double