


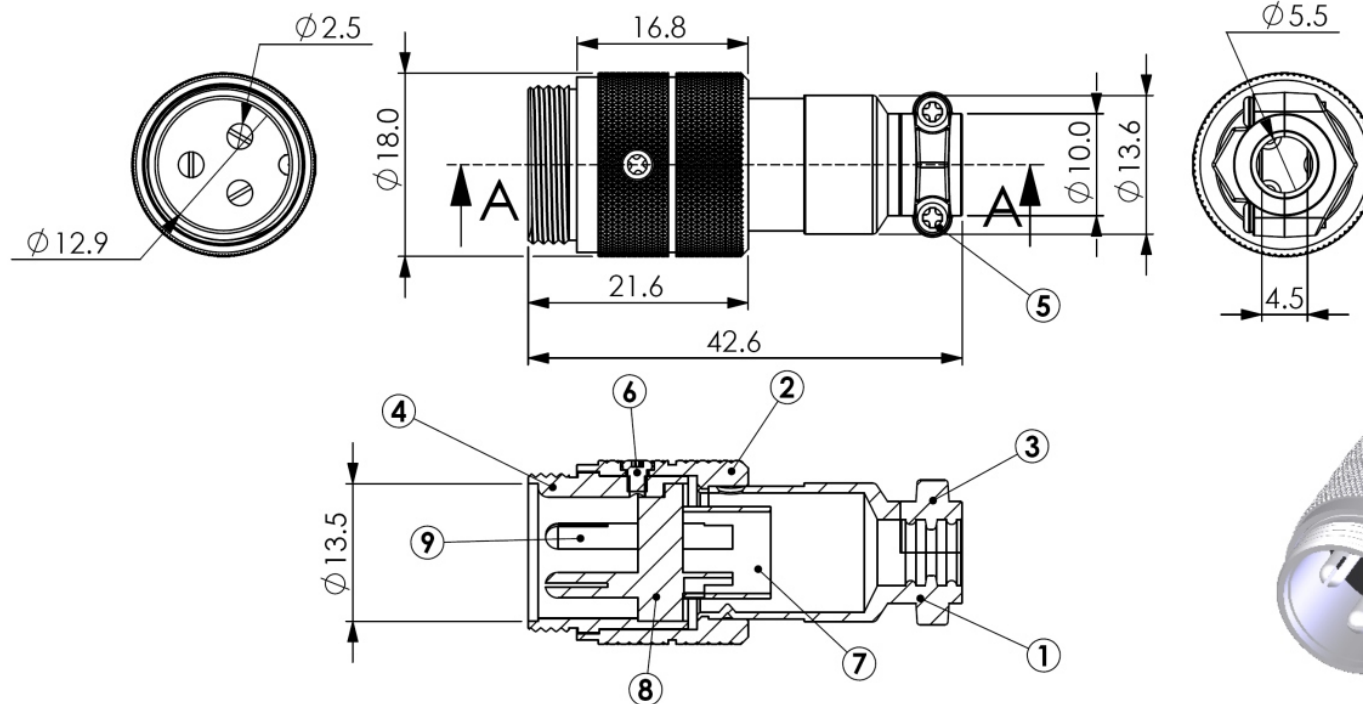

9	Contact Terminals	Brass	Nickel Ptd.	3
8	3P Housing	Bakelite		1
7	Insulation Tube	PVC		1
6	Setscrew	Steel	Nickel Ptd.	1
5	Holder Screw	Steel	Nickel Ptd.	2
4	Shield Cover	Zn Alloy	Nickel Ptd.	1
3	Cable Holder	Zn Alloy	Nickel Ptd.	1
2	Body Cap	Zn Alloy	Nickel Ptd.	1
1	Main Body	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

Specifications:

Contact resistance:
 300 mohm max.
Insulation resistance:
 100 Mohms 250V DC
Withstanding voltage:
 1 min at 250V AC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

XLR-PA-03-LF
 SERIES | LEADFREE
 03WAY
 ASSEMBLY
 MALE

DESCRIPTION: