
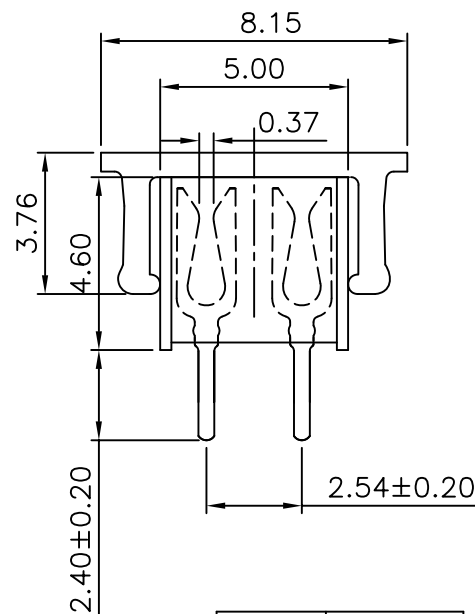


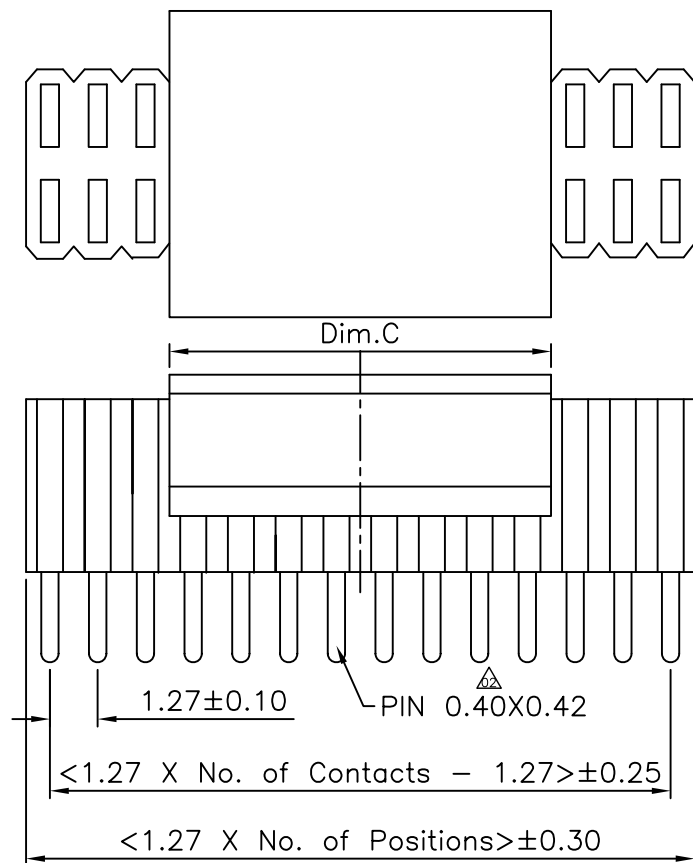

Dim.C	NOTE
4.00mm	03~07Pin
10.15mm	08~50Pin

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
LCP

Recommended P.C.B. Layout

(Tolerance: ±0.05)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

Y-D46C-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X50:100WAY
CAP
HIGH 4.6mm
DIP 180°

DESCRIPTION: 1.27*2.54mm Post Header Receptacle PCB Mount Vertical Type Dual Rows