

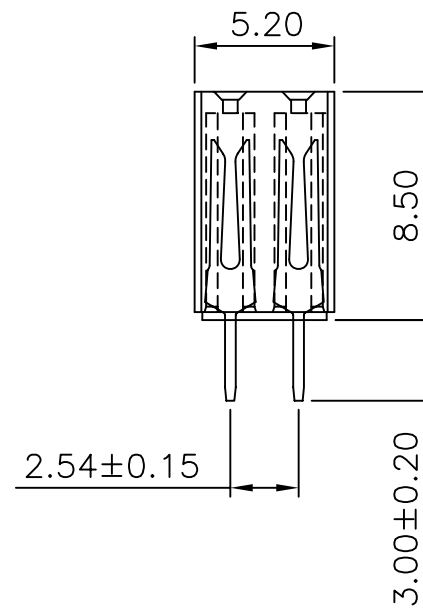
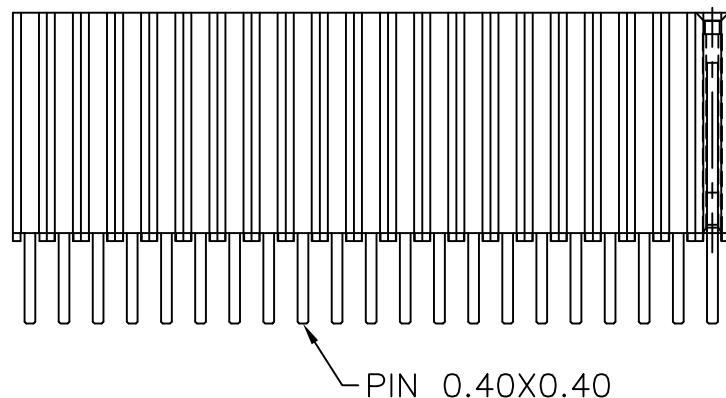


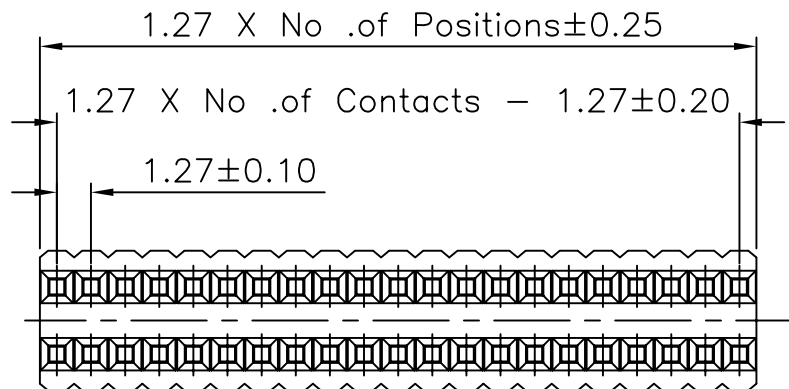

Recommended P.C.Board
Hole Layout

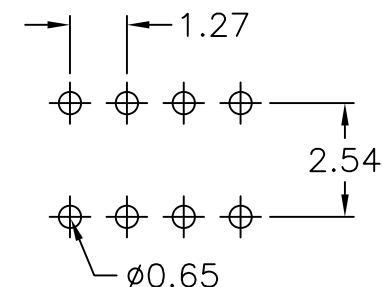

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20m Ω Max.

Operating Temperature: -40°C to $+105^{\circ}\text{C}$

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

Nylon-6T

All materials must be GP materials

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG $\pm$



ORDER INFORMATION

Y-D85-2Xxx-LF
SERIES
LEADFREE
2X02:04WAY
2X50:100WAY
HIGH 8.5mm
DIP 180°

DESCRIPTION: 1.27X2.54 FEMALE DUAL ROWS DIP TYPE BASE 8.5