

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding Voltage: 300VAC

Contact Resistance: 20mΩ Max.



Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C. Board Layout
(Tolerance: ±0.05)

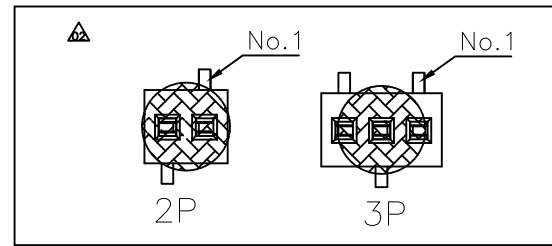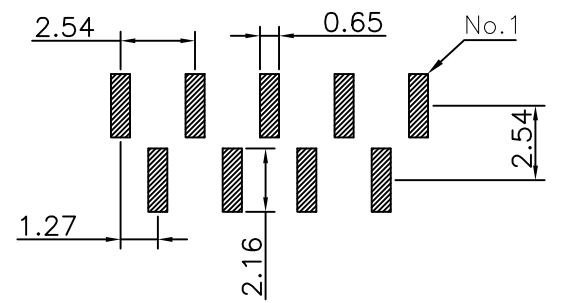

RoHS Compliant

TOLERANCES ARE

X ± 0.30

.X ± 0.25


.XX ± 0.15

.XXX ± 0.10

ANG ±

照片框

ORDER INFORMATION

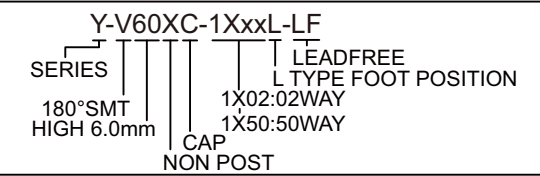

DESCRIPTION: 1.27 FEMALE HEADER SINGLE ROW SMT TYPE CONNECTOR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X ± 0.30 .X ± 0.25 .XX ± 0.15 .XXX ± 0.10 ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	