



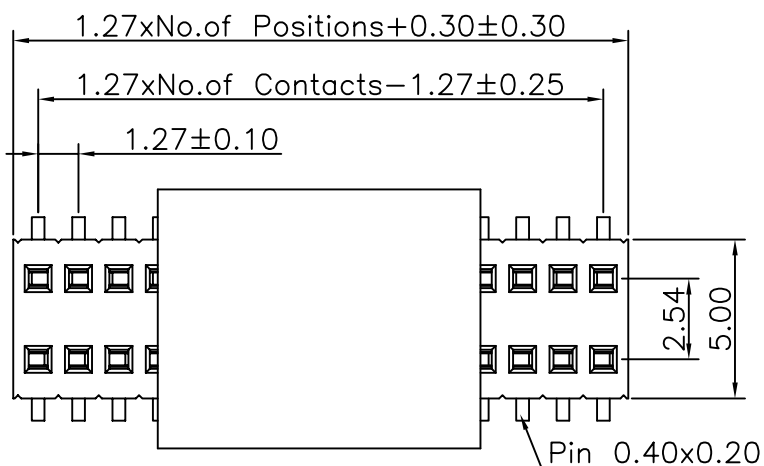

Dim.C	NOTE
4.00	03~25PIN
10.15	26~50PIN

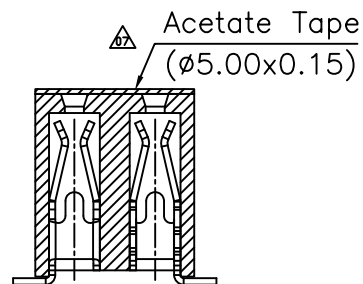

Specifications

Current Rating:1Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:300VAC

Contact Resistance:20mΩMax.



Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature


Thermoplastic, UL 94V-0 LCP or the equivalent material

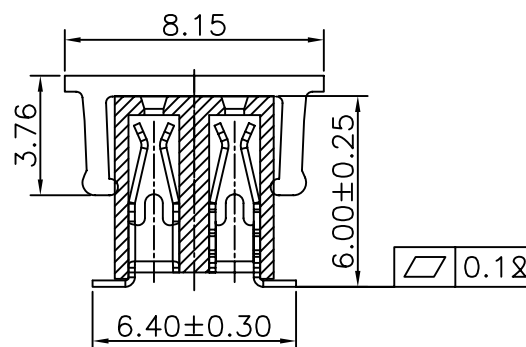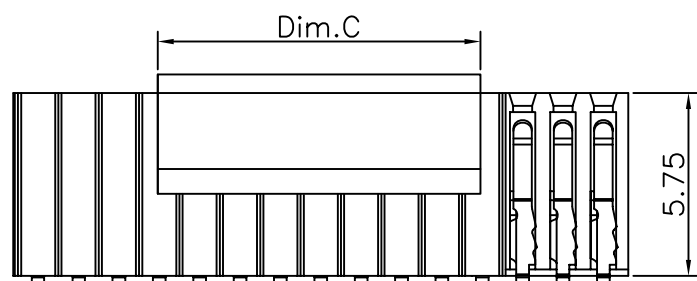

Recommended P.C.Board

Layout

(Tolerance:±0.05)

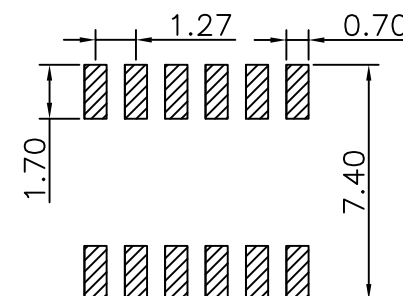

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Y-V60XC-2Xxx-LF
SERIES LEADFREE
180°SMT 2X03:06 WAY
CAP 2X50:100 WAY
NON POST
HIGH 6.0mm

DESCRIPTION: