


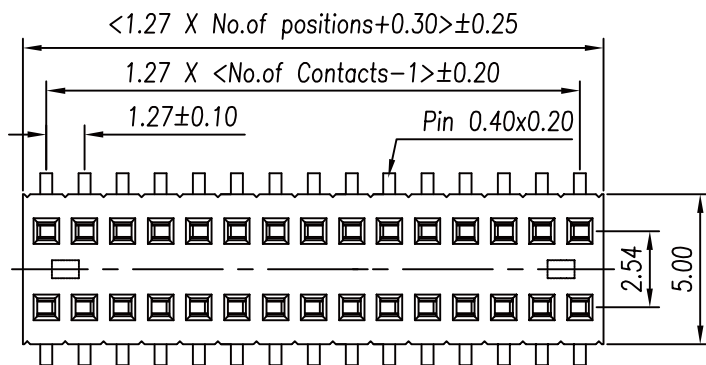

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20m Ω Max.



Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

LCP $\triangle$

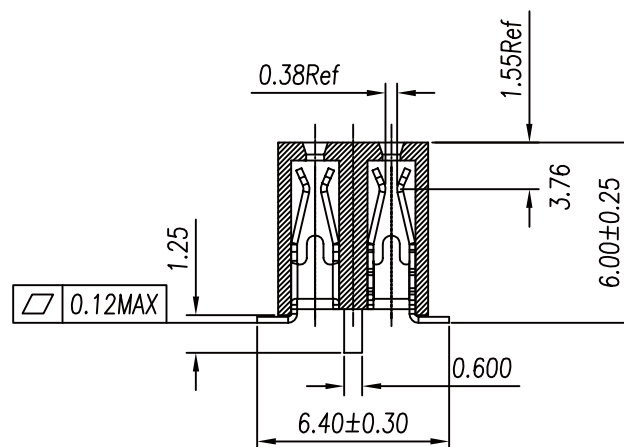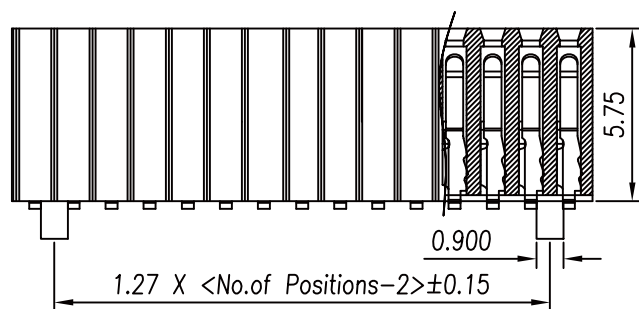

X	NOTE
4.00	03~25PIN
10.15	26~50PIN $\triangle$

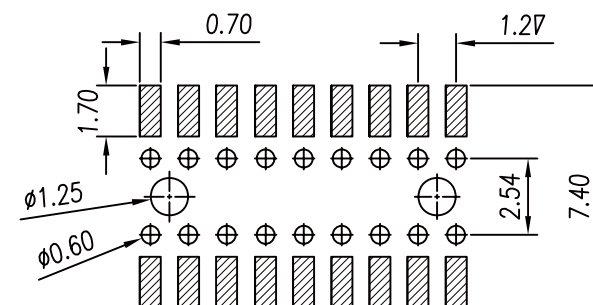

$\triangle$ RECOMMENDED P.C.B LAYOUT
FOR BOTTOM ENTRY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION $\rightarrow$

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$



ORDER INFORMATION

Y-Z60P-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X50:100WAY
CAP
HIGH 6.0mm
BOTTOM ENTRY SMT

DESCRIPTION: