
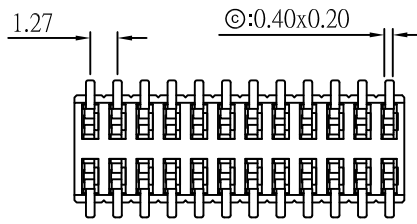


04-20 pin : 0.10 mm MAX.
22-60 pin : 0.20 mm MAX.
62-100 pin : 0.30 mm MAX.


0.10	04-50P
0.12	52-80P
0.15	82-100P

Dim.A 6.40



Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic,UL 94V-0
 Finish: Standard: Gold Flash all over

Recommended P.C. Board
SMD Layout

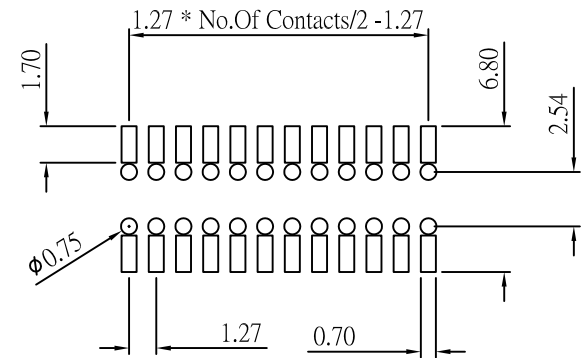

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

Y-Z60X-2Xxx-LF
 SERIES | LEADFREE
 2X02:04WAY
 2X50:100WAY
 NON POST
 HIGH 6.0mm
 BOTTOM ENTRY SMT

DESCRIPTION: