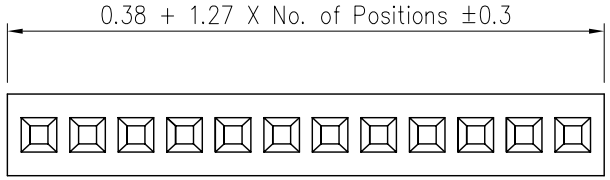



Specifications

Current Rating : 1 Amp
Insulator Resistance : 1000 Megohms min.
Contact Resistance : 20 m ohms max.
Dielectric Withstanding : AC 300V
Operating Temperature : −40°C ~ +105°C
Contact Material : Phosphor Bronze
Insulator Material : Polyester, UL 94V−0
Standard :LCP
Contact Plated : See Option/Standard:Full Gold Flash

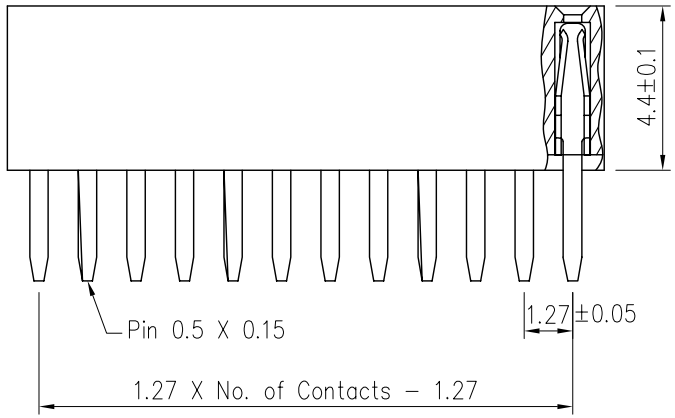



RoHS Compliant

煜倫股份有限公司
MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

YA-D44-1Xxx-LF
SERIES
DIP 180°
HIGH 4.40mm
1X50:50WAY
1X02:02WAY
LEADFREE

DESCRIPTION: Female Header P1.27mm Profile :4.4mm, Single Row, Straight Type