



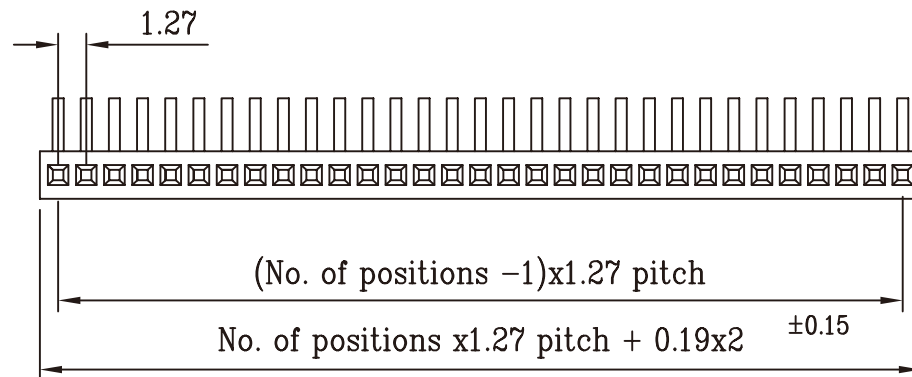

CONTACT RESISTANCE: 20m OHMS MAX. AT
DC 100mA
INSULATOR RESISTANCE: 1000M OHMS MIN.
AT DC 500V
CURRENT RATING: 1 AMP

DIELECTRIC WITHSTANDING
VOLTAGE: AC 500V FOR 1 MINUTE
OPERATING TEMPERATURE: -55°C - +105°C
CONTACT: PHOSPHOR BRANZE
HOUSING: L.C.P.(Black Color)

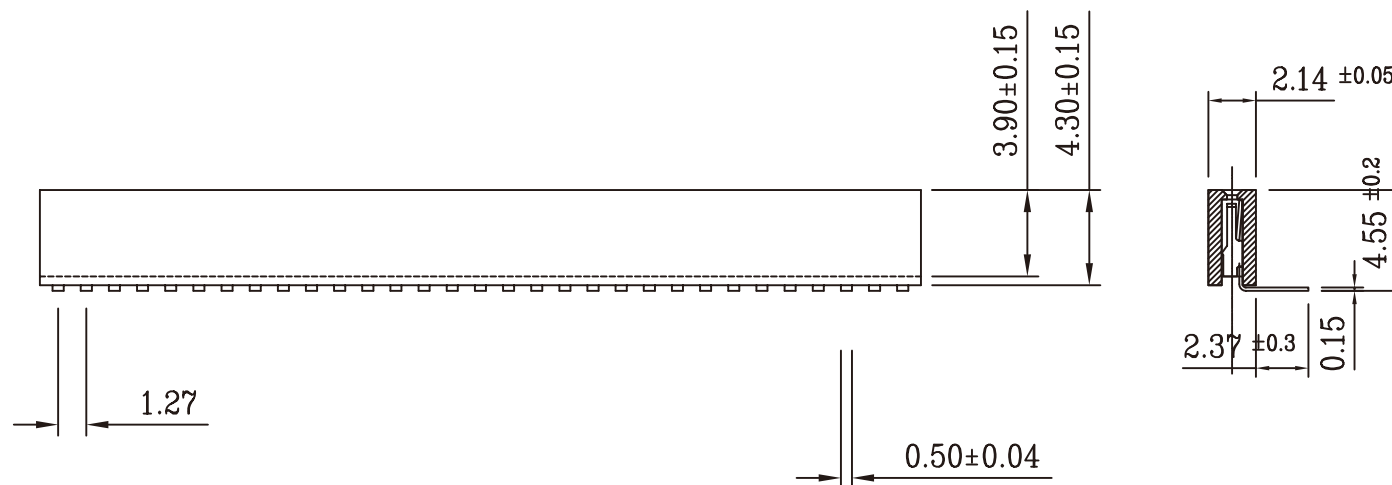

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.15
.XX ± 0.10
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

YA-R43-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X50:50WAY
HIGH 4.3mm
DIP 90°

DESCRIPTION: 1.27mm Dip Socket (Straight/Base:4.3mm)