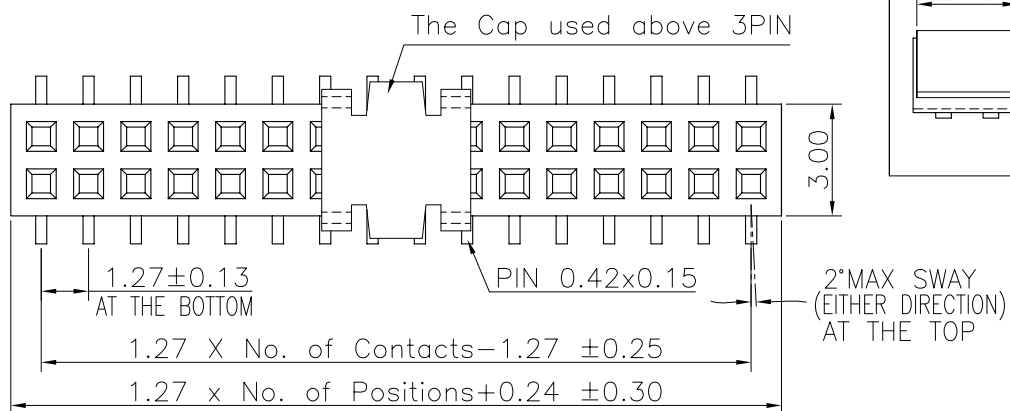


Specifications

Current Rating:1.0Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:300VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C


Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 LCP


or the equivalent material

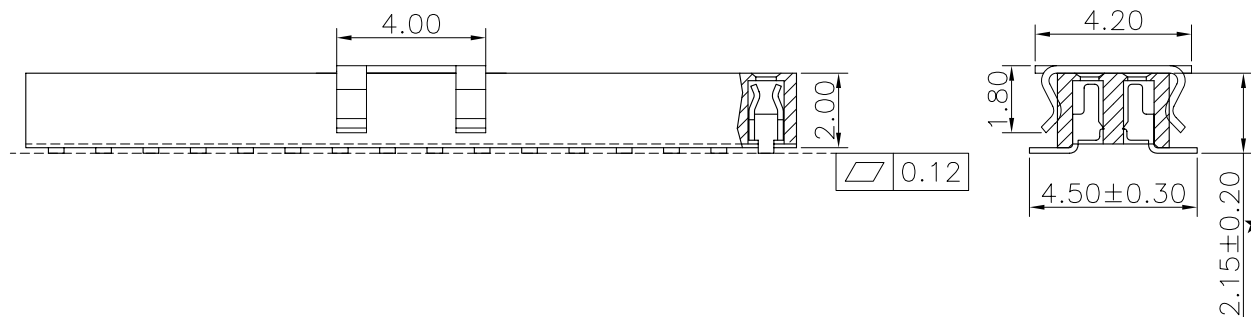

Recommended P.C.Board Layout

FOR TOP ENTRY

(Tolerance:±0.05)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

YA-V22XC-2Xxx-LF

SERIES LEADFREE
2X02:02WAY
2X40:80WAY
CAP
NON POST
HIGH 2.15mm
180°SMT

DESCRIPTION:1.27 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR