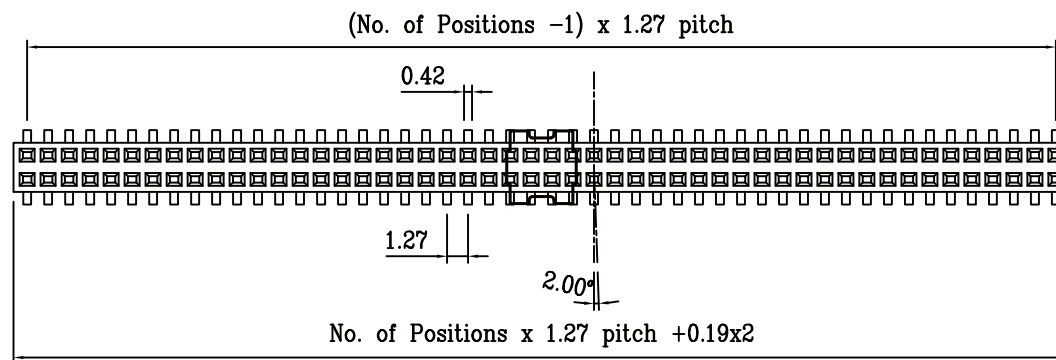


Recommended P.C.B. Layout

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION




ORDER INFORMATION

YA-V22XCR-2Xxx-LF

SERIES | LEADFREE
2X03:06WAY
2X50:100WAY

180°SMT | REEL
HIGH 2.2mm | CAP
NON POST

DESCRIPTION: 1.27X1.27mm SOCKET LOW PROFILE 2.2mm SMD TYPE

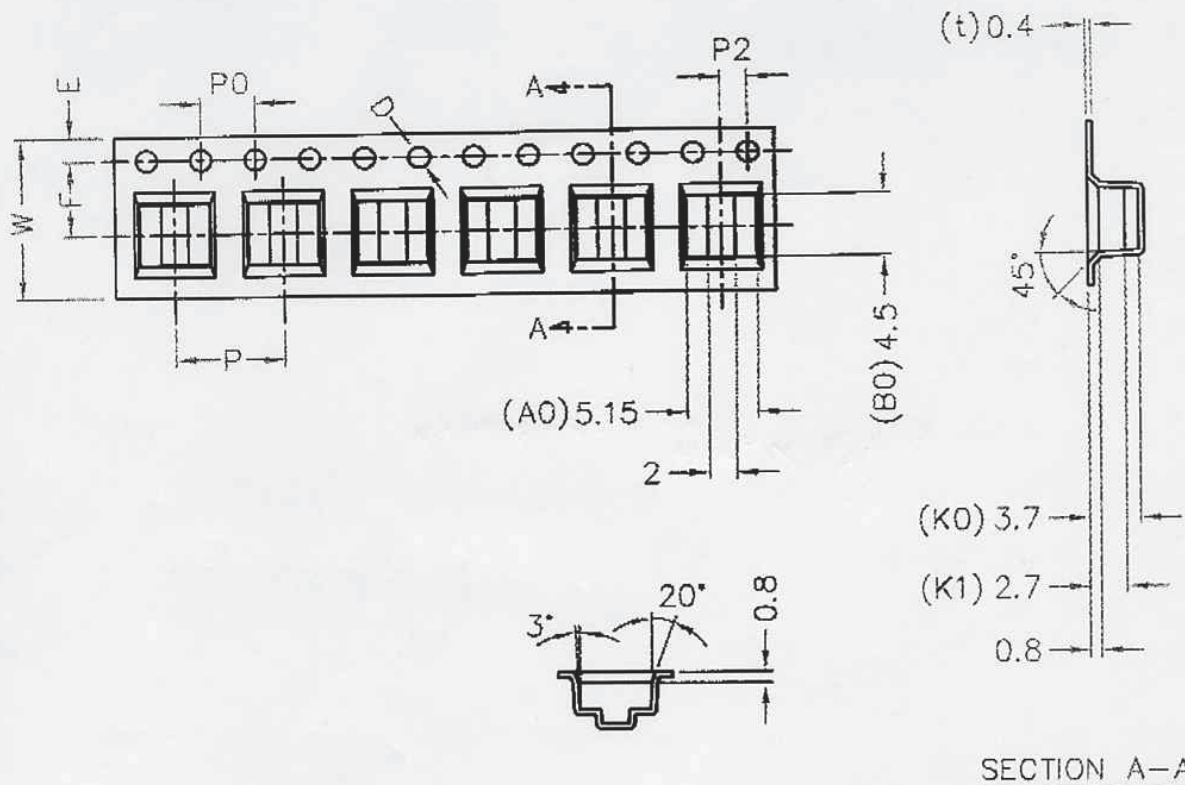

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
2. Carrier camber not to exceed 1mm in 100mm.
3. A_0 and B_0 measured on a plane 0.3mm above the bottom of the pocket.
4. K_0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481-C requirements.
6. Material: Black Anti-static Polystyrene.
7. Thickness: $0.40 \pm 0.05\text{ mm}$.
8. Packing length per 22" reel : 56 Meters.

ITEM	W	A_0	B_0	K_0	K_1	P	F	E	D	D_1	P_0	P_2
DIM	12.0 +0.30 -0.30	5.15 +0.20 -0.10	4.50 +0.20 -0.10	3.70 +0.20 -0.10	2.70 +0.20 -0.10	8.00 +0.10 -0.10	5.50 +0.10 -0.10	1.75 +0.10 -0.10	1.50 +0.10 -0.00	0.00 +0.25 -0.00	4.00 +0.10 -0.10	2.00 +0.10 -0.10
ALTERNATE						問題卷明： (Note:)						
客6確認： Customer Approved:						確認日期： Date:						

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PJECTION



ORDER INFORMATION

YA-V22XCR-2Xxx-LF
SERIES
180°SMT
HIGH 2.2mm
LEADFREE
2X03:06WAY
2X50:100WAY
REEL
CAP
NON POST

DESCRIPTION: 1.27X1.27mm SOCKET LOW PROFILE 2.2mm SMD TYPE