

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze
Insulator: NYLON 46

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

P PROJECTION

X. ±
.X ± 0.30
.XX ± 0.15
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

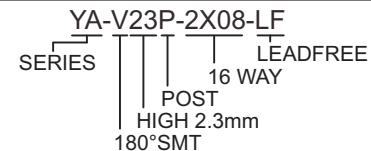

DESCRIPTION: FEMALE HEADER 1.27*1.27mm SMT TYPE, DUAL ENTRY HEIGHT 2.15mm, TUBE