
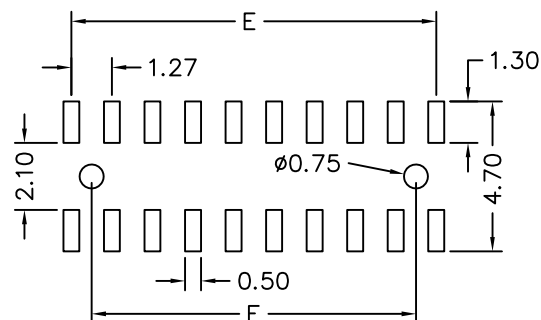

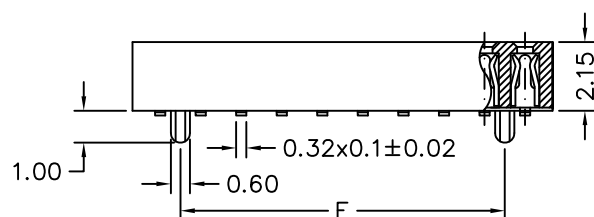


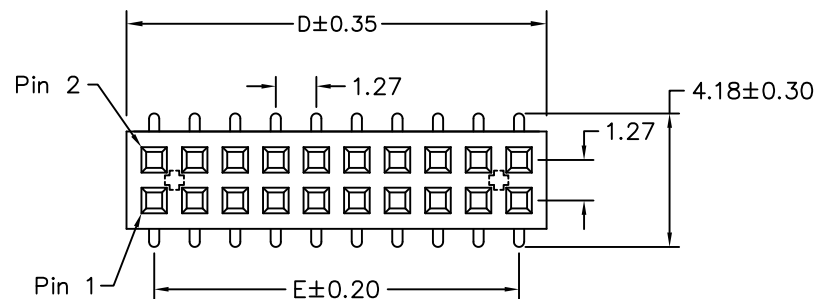

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

POLES	DIM D	DIM E	POLES	DIM D	DIM E	POLES	DIM D	DIM E
3	4.27	2.54	19	24.59	22.86	35	44.91	43.18
4	5.54	3.81	20	25.86	24.13	36	46.18	44.45
5	6.81	5.08	21	27.13	25.40	37	47.45	45.72
6	8.08	6.35	22	28.40	26.67	38	48.72	46.99
7	9.35	7.62	23	29.67	27.94	39	49.99	48.26
8	10.62	8.89	24	30.94	29.21	40	51.26	49.53
9	11.89	10.16	25	32.21	30.48	41	52.53	50.80
10	13.16	11.43	26	33.48	31.75	42	53.80	52.07
11	14.43	12.70	27	34.75	33.02	43	55.07	53.34
12	15.70	13.97	28	36.02	34.29	44	56.34	54.61
13	16.97	15.24	29	37.29	35.56	45	57.61	55.88
14	18.24	16.51	30	38.56	36.83	46	58.88	57.15
15	19.51	17.78	31	39.83	38.10	47	60.15	58.42
16	20.78	19.05	32	41.10	39.37	48	61.42	59.69
17	22.05	20.32	33	42.37	40.64	49	62.69	60.96
18	23.32	21.59	34	43.64	41.91	50	63.96	62.23

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

YA-V23P-2Xxx-LF
SERIES
LEADFREE
2X03:06 WAY
2X50:100 WAY
POST
HIGH 2.3mm
180°SMT

DESCRIPTION: FEMALE HEADER 1.27*1.27mm SMT TYPE, DUAL ENTRY HEIGHT 2.15mm, TUBE