

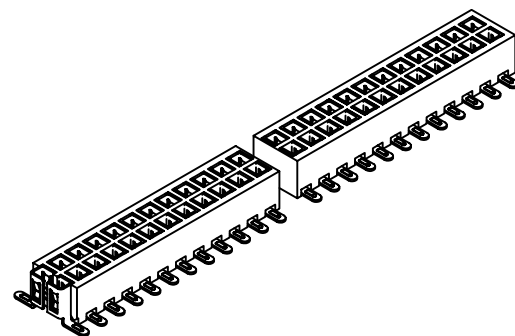
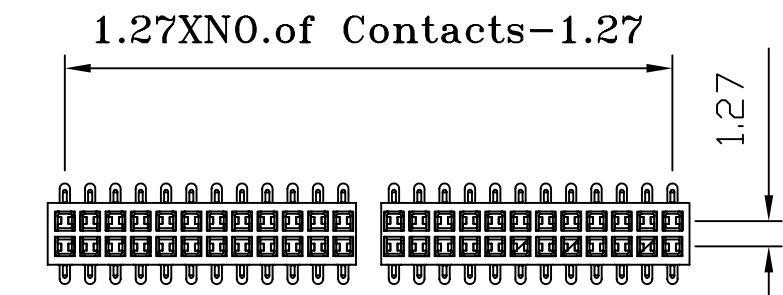


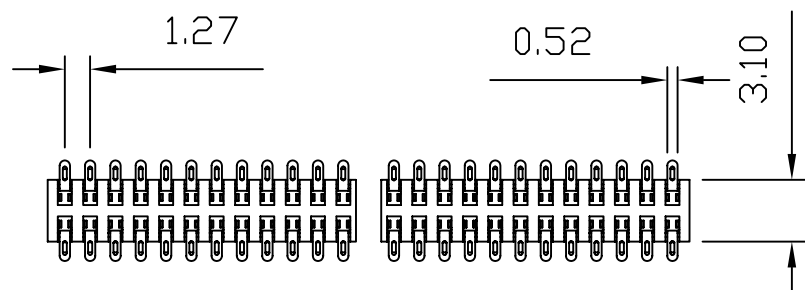


Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Dielectric Withstanding: AC 500 V
 Operating Temperature: - 40° ~ +85° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T


Standard: Gold Flash all over

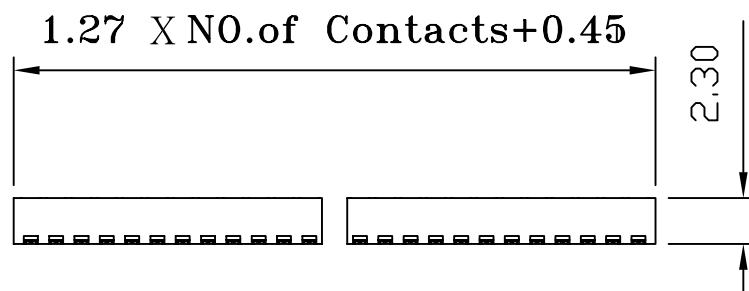

Dim.A 5.05



Recommended P.C. Board
 SMD Layout

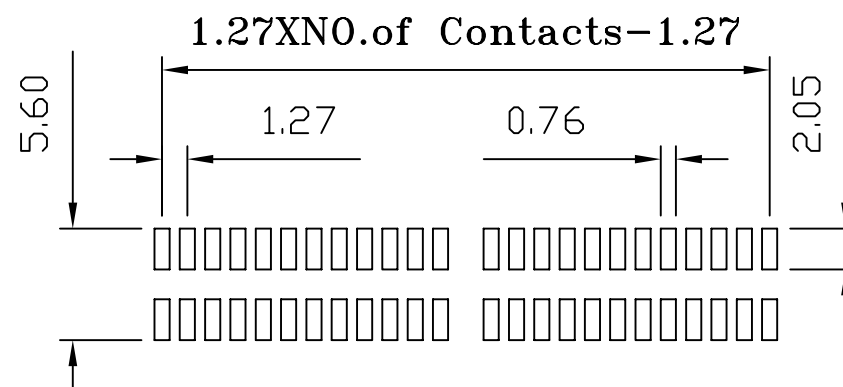

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

YA-V23X-2Xxx-LF
 SERIES LEADFREE
 2X03:06 WAY
 2X50:100 WAY
 NON POST
 HIGH 2.3mm
 180°SMT

DESCRIPTION: