

1.MATERIAL

Contact: Phosphor, GOLD PLATING OVER ALL

30u" NICKEL UNDERPLATING OVER ALL

2.characteristics:

Raring Current:1 AMP.

Contact Resistance:20 mΩ MAX.



Insulating Resistance:1000 MΩ MIN.

Withstanding Voltage:AC 500V/Minute.

Temperature Range: -40°C to +105°C



General Tolerance ± 0.05

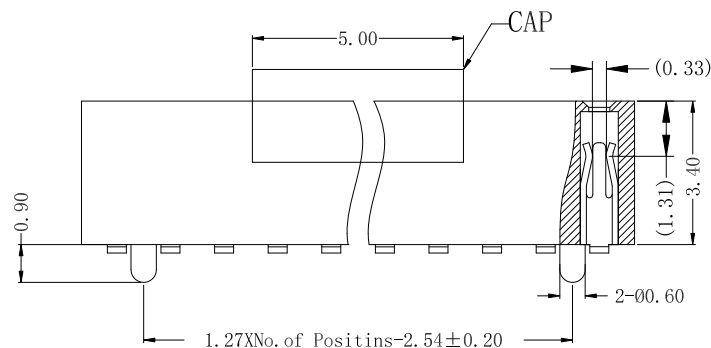

	0.15
	0.12
	0.10

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. $\pm$
 .X $\pm$ 0.25
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$ 3°

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

PROJECTION

照片框

ORDER INFORMATION

YA-V36PC-2Xxx-LF

SERIES 180°SMT CAP POST HIGH 3.6mm 2X03:06 WAY 2X50:100 WAY LEADFREE

DESCRIPTION: FH1.27*3.4 2*XXP SMT:4.8 U型 帶柱 LCP 鍍普金 CAP管裝

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com