
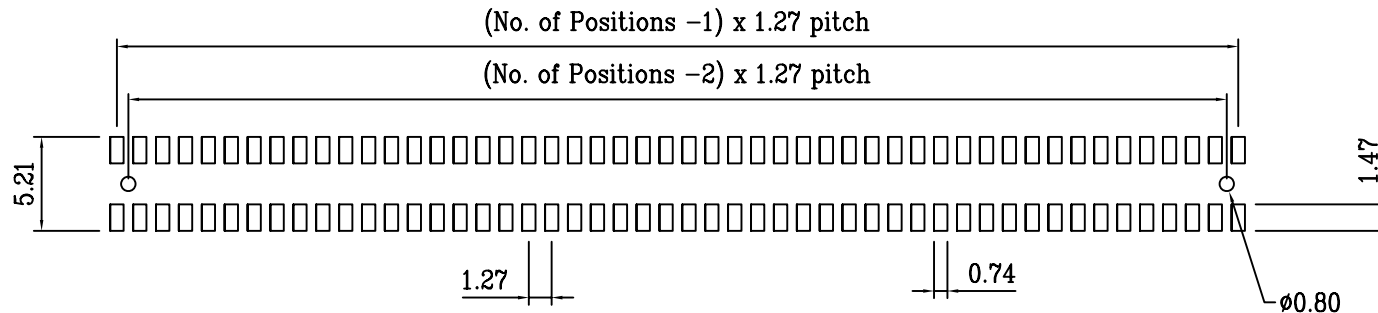

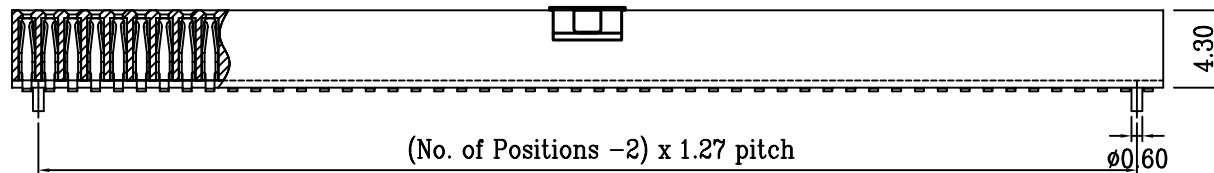


SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40° – $+105^{\circ}$ C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

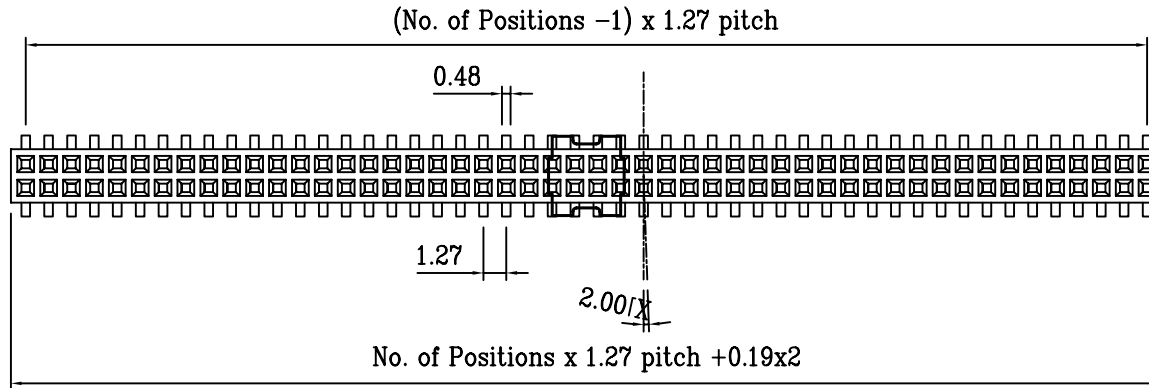

Recommended P.C.B. Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

YA-V45PS10C-2Xxx-LF
SERIES
180°SMT
HIGH 4.5mm
LEADFREE
2X02:04WAY
2X50:100WAY
CAP
SEMI GOLD 10u"
POST

DESCRIPTION: Dual Row 1.27x1.27 SMD Female