



Specifications

Current Rating	:1 Amp
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40 °C ~ +105°C
Max Processing Temp	:230 °C for 60 seconds
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

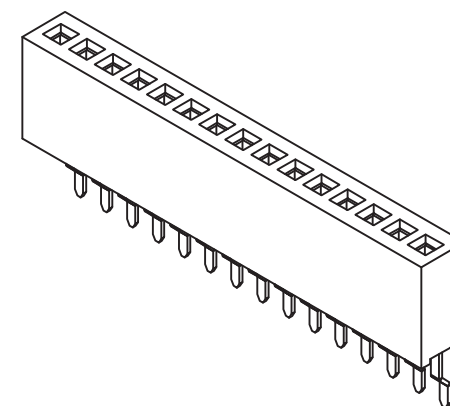

P.C. Board Hole Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

YA-WX43-1Xxx-LF
 SERIES LEADFREE
 1X02:02 WAY
 1X40:40 WAY
 HIGH 4.3mm
 NON POST
 90°SMT

DESCRIPTION: 1.27mm Female Header H:4.3W:2.2 Nylon-6T (環保材料)