
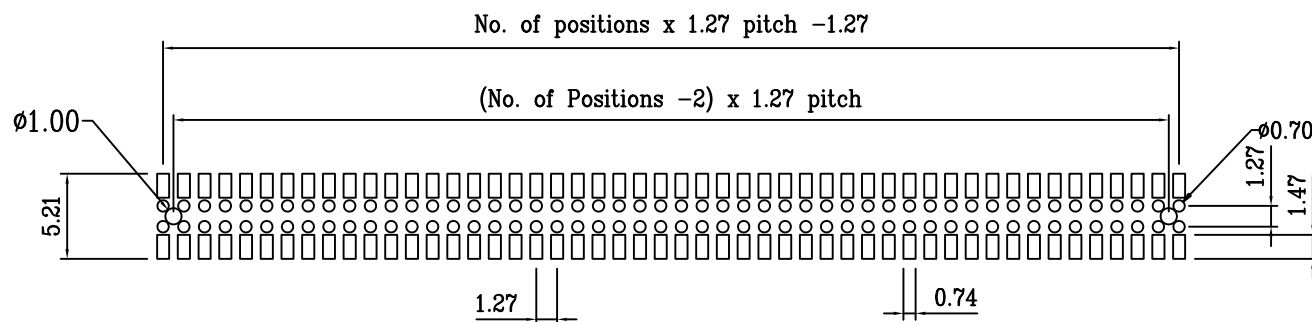

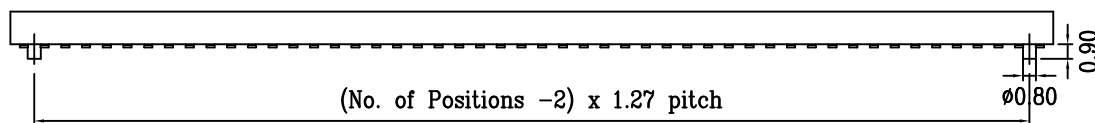


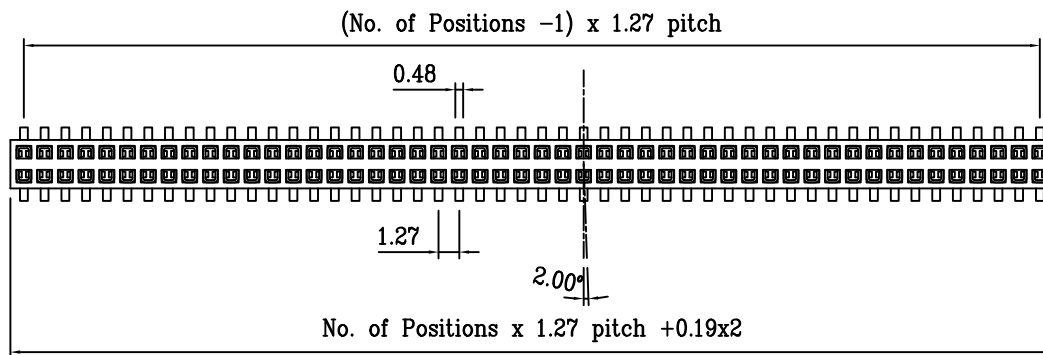

Recommended P.C.B. Layout

## SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30~60 seconds  
(260° for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.35  
.XX ± 0.25  
.XXX ±  
ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**

YA-Z22P-2Xxx-LF  
SERIES LEADFREE  
2X03:06 WAY  
2X50:100 WAY  
POST  
HIGH 2.2mm  
BOTTOM ENTRY SMT

DESCRIPTION: 1.27X1.27mm SOCKET LOW PROFILE 2.2mm SMD TYPE