
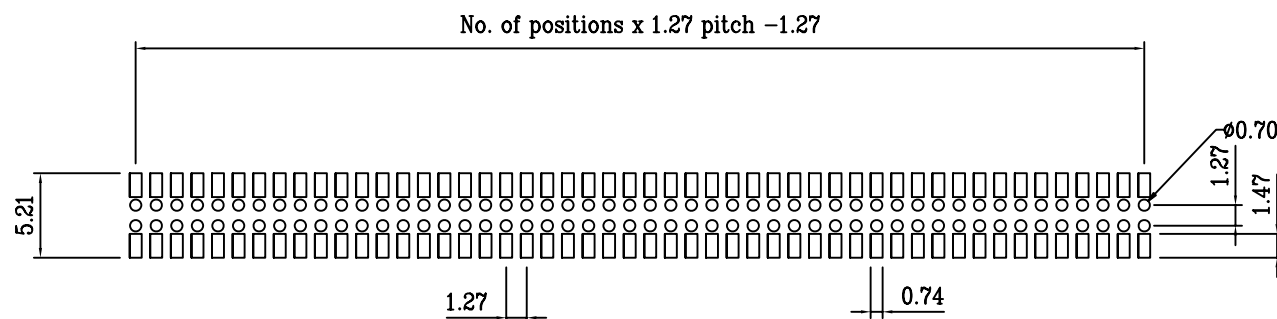



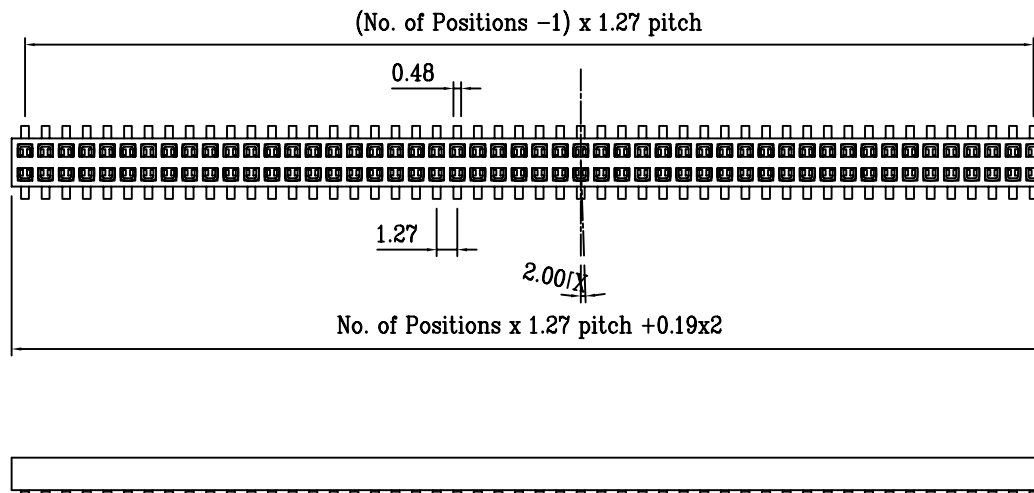

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°~+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

Recommended P.C.B. Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

YA-Z22X-2Xxx-LF

SERIES | 2X02:04WAY | LEADFREE

2X40:80WAY

BOTTOM ENTRY SMT | NON POST

HIGH 2.2mm

DESCRIPTION: 1.27X1.27mm SOCKET LOW PROFILE 2.2mm SMD TYPE