
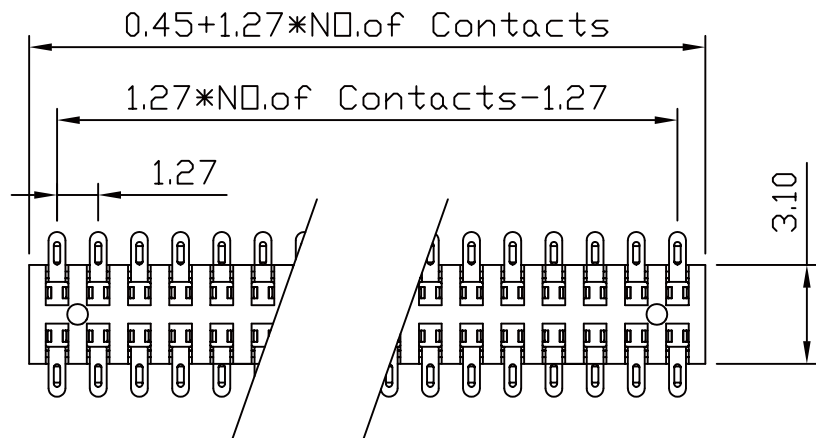
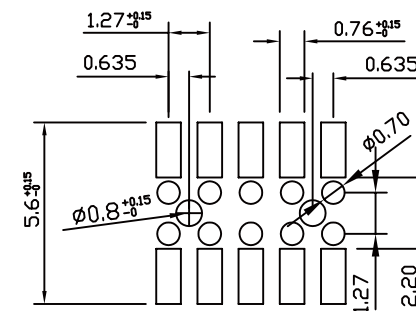


MATERIALS:
INSULATOR: NYLON-6T, UL94V-0
COLOUR: BLACK
CONTACTS: BRASS, GOLD FLASH
OVER NICKEL PLATED CONTACT AREAS,
TIN PLATED SOLDER TAILS.

ELECTRICAL:
CURRENT RATING: 1AMP.
INSULATION RESISTANCE: 30 MILLION HMS MAX.
DIELECTRIC WITHSTANDING: 500VAC
OPERATING TEMPERATURE: -40°C ~ +105°C
MAX. PROCESSING TEMPERATURE: 230°F FOR 30/60 SEC.
260°F FOR 10 SEC.

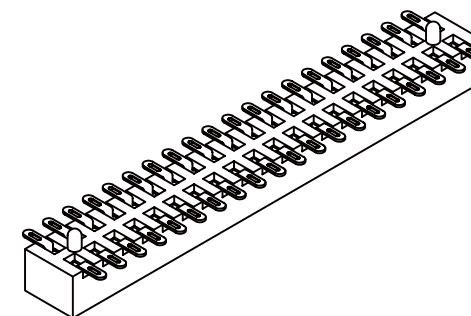

Recommended P.C. Board
SMD Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

PPOJECTION



ORDER INFORMATION

YA-Z23P-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X40:80WAY

POST

HIGH 2.3mm

BOTTOM ENTRY SMT

DESCRIPTION: