


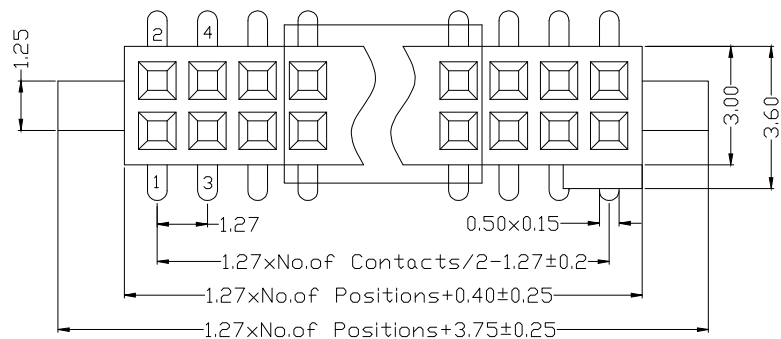




Specifications

1. MATERILA :

Housing : LCP+30%G.F UL94V-0 , Color : Black
Contact : Phosphor , GOLD FLASH PLATING OVER ALL
30u" NICKEL UNDERPLATING OVER ALL

2. characteristics :

Raring Current : 1AMP
Contact Resistance : 20MΩ MAX.
Insulating Resistance : 1000MΩ MIN.
WithstWanding Voltage : AC 500V/Minute.
Temperture Range : -40℃ to +105℃

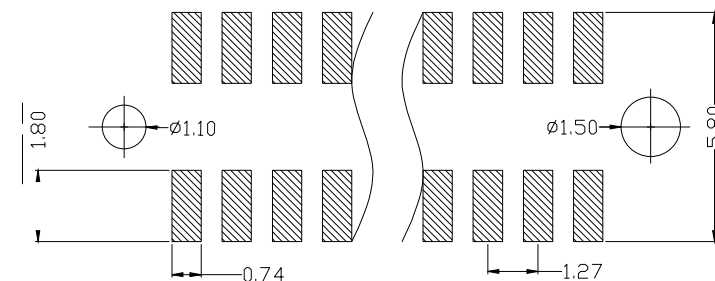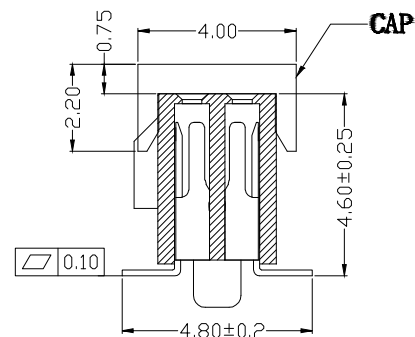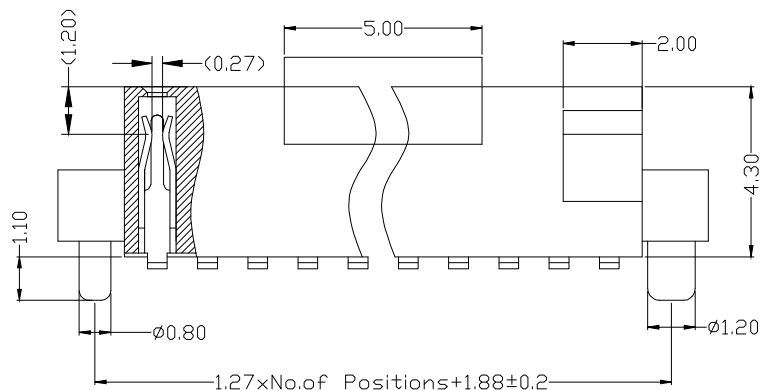

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

YAB-V46PC-2Xxx-LF
SERIES | | | LEADFREE
2X03:06 WAY
2X50:100 WAY
CAP
180° SMT POST
HIGH 4.65mm

DESCRIPTION: 1.27mm 膠高4.3 雙排母SMT 帶柱 帶防呆 LCP料 鍍普金