
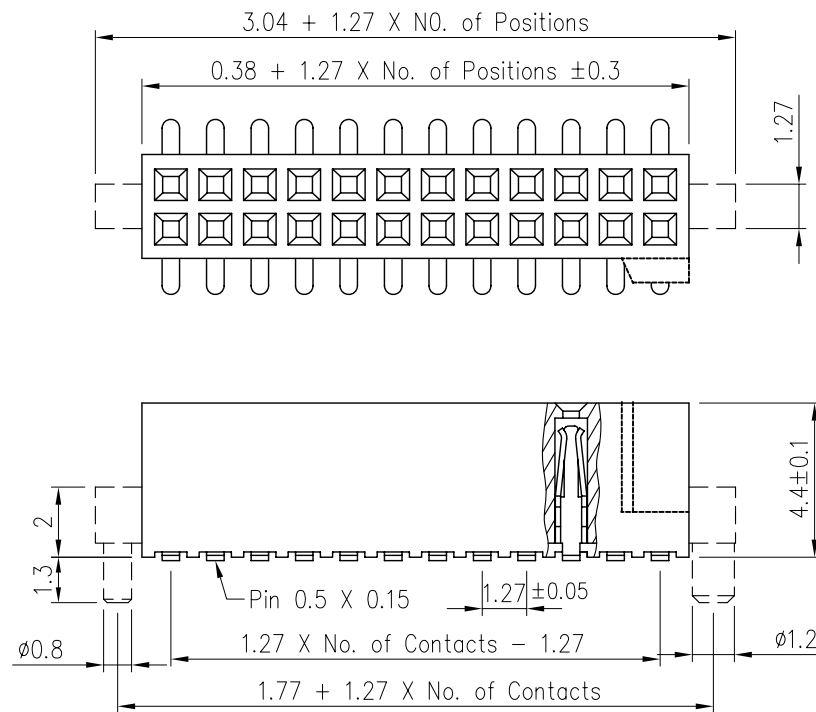


Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 300V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Contact Plated : See Option / Standard: Full Gold

Recommended P.C. Board Hole Layout

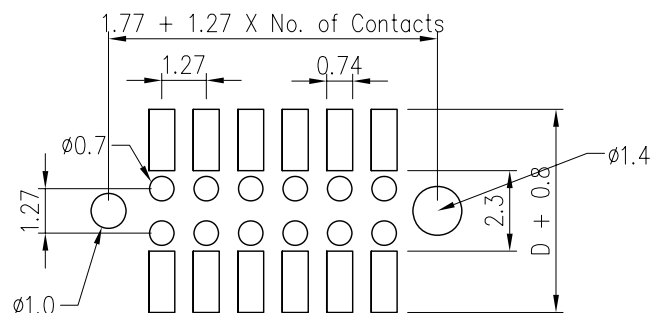

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

YAB-Z45P-2Xxx-LF
 SERIES | | LEADFREE
 2X03:06 WAY
 2X50:100 WAY
 POST
 HIGH 4.5mm
 BOTTOM ENTRY SMT

DESCRIPTION: Female Header P1.27X1.27mm Profile : 4.4mm, Dual Rows, SMT Type