


SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

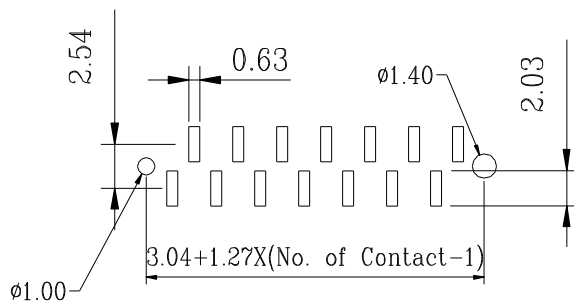

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.20

CHECKED BY GENIUS

.X ± 0.15

UNIT / mm

SCALE 1 : 1

.XX ± 0.10

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

YAX-V45PC-1XxxL-LF

SERIES	LEADFREE
180°SMT	L TYPE FOOT
HIGH 4.5mm	1X02:02 WAY
CAP POST	1X50:50 WAY

DESCRIPTION: 1.27mm SMD Socket post type (Base: 4.5mm)

煜倫股份有限公司

www.morethanall.com